



**RC100**

**COMPACTORS**



# Flat-out value proven productivity, reliability, durability.



A machine needs to work to earn its keep. Rhino Equipment Vibratory Soil Compactors are well equipped to perform a wide range of applications. Options like padfoot shell kits, leveling blades and Rhino's dual vibration system add capability, making your Rhino Vibratory Soil Compactor the machine of choice no matter what the application requires.



1. Operating station adjusts to suit operator comfort, and the console provide fingertip access to machine features and operating information.
2. Optional maintenance-free, rugged, oscillating-articulation joint eliminates daily grease points.
3. A tamping foot available roller has feet, or pads, that penetrate the soil, compacting from the bottom to the top for uniform density.



### OPERATING WEIGHT

Operating Weight with Drum Drive System Kg (lb) / Optional	10,000 (22,046) / 10,200(22,487)
Operating Weight with Drum Drive System and Pad Foot Kg (lb) / Optional	11,130(24,537) / 11,330 (24,978)
Machine with Cab Kg (lb) / Optional	10,200(22,487) / 10,400(22,928)
Weight at the Drum with Cab Kg (lb) / Optional	4,850 (10,692) / 5,600(12,346)
Weight at the Rear Axel with Cab Kg (lb) / Optional	4,150(9,149) / 4,600(10,141)
Static Linear Load kg/cm (lb/in)	24.2(13.8)

### VIBRATORY SYSTEM

Min. Frequency Hz (vpm)	30(1,800)
Max. Frequency Hz (vpm)	36(2,160)
Nominal Amplitude @ Max. Frequency	
High mm (in)	1.9(0.07)
Low mm (in)	0.9(0.04)
Centrifugal Force	
High kN (lbf)	270(60,698)
Low kN (lbf)	170(38,218)

### POWER TRAIN

Engine Make / Model	Cummins 6BT5.9 or Rhino
Net Power kW (Hp) @ 2,300 rpm	110(148)
Displacement L (cu. In)	5.9(360)
Peak Torque Nm (ft-lb) @ 1,600 rpm	560(413)
Emissions (optional)	Tier2 (Tier3, Tier4)
Fuel System	Direct Injection
Lubrication	Full-flow spin-on filter
Aspiration	Turbocharged
Air Cleaner	Under-hood, dual element dry type
Fan Drive	Belt driven
Electrical System	24 Volts with 70 Amp alternator
Axle	Limited slip with planetary reduction
Tire / Optional	16-24 14 Ply / 23.1-26 12 layers
Oscillation Angle of Vibration Drum	18 degrees

### TRANSMISSION

Type	Hydrostatic, closed center, constant-meshing gearing
Travel Speed kph (mph)	10.0(6.2)



### HYDRAULIC SYSTEM

Pump Type	Piston pump, Variable displacement, Closed Center
System Pressure Mpa (psi)	35(5,076)
Vibration System Pressure Mpa (psi)	14(2,031)
Steering System Pressure Mpa (psi)	11(1,595)

### BRAKE SYSTEM


Service Brakes	Pneumatically assisted, hydraulically actuated, two wheels disk brake; Dynamic braking whenever the direction control lever is moved to the neutral position
Parking Brake	Manually activated, disk brake mounted on transmission output shaft

### REFILL CAPACITIES L (gal)

Fuel Tank	250(66)
Engine Oil	15(4)
Hydraulic Tank	100(26)
Gear Box	2.2(0.6)
Axle Oil	18(5)
Brake System	1.5(0.4)
Vibration Drum (both sides, each)	9(2)

Compactor operating information is based on machine with identified linkage and standard equipment, standard tires, full fuel tank, and 79-kg (175 lb.) operator. This information is affected by changes in tires, ballast, and different attachments.

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

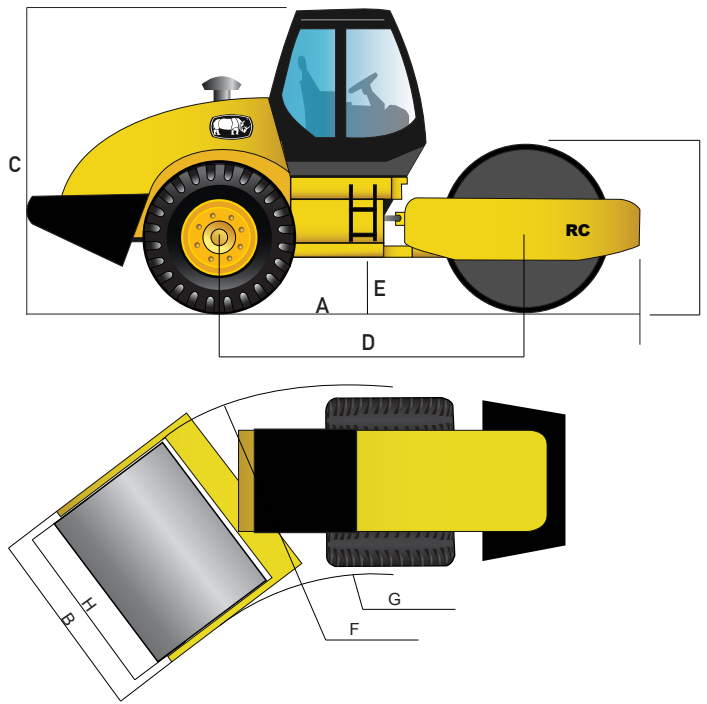

## MACHINE DIMENSIONS

A Overall Length mm (ft)	6,000(19.7)
B Overall Width mm (ft)	2,250(7.4)
C Max. Machine Height mm (ft)	2,950(9.7)
D Wheelbase mm (ft)	3,050(10.0)
E Ground Clearance mm (ft)	472(1.5)
F Min. Turning Radius mm (ft)	6,500(21.3)
G Articulation Angle	35 degrees
Gradeability	40%

## DRUM DIMENSIONS

H Drum Width mm (in)	2,100(82.7)
I Drum Diameter mm (in)	1350(53.1)
Drum Shell Thickness mm (in)	25(1.0)

## OPTIONS

- ROPS/FOPS Cab
- A/C
- 160 Lt or more water tank and pressurized water Spray System
- Drum Drive System
- Pad Foot
- Dozer Blade
- Tier3, Tier4 engine
- Asphalt Smooth Wheels
- Maintenance-free, rugged, oscillating-articulation joint eliminates daily grease points

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.