




**RCT60H**

**TANDEM VIBRATORY ROLLER**




# Drum Choices For Productivity.

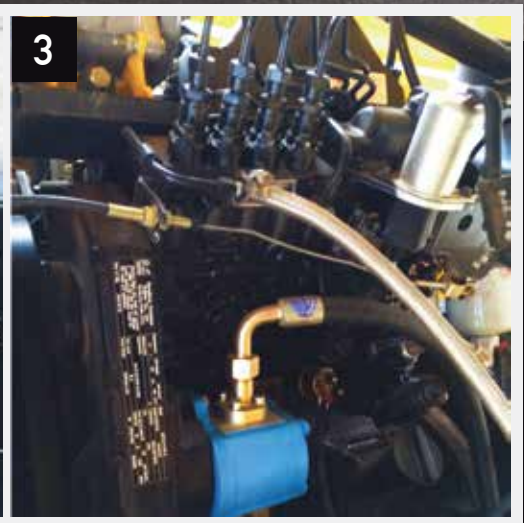

Rhino Double Drum Compactors are manufactured with the highest standards of quality and are suitable for compacting a wide variety of materials like stabilized soil, bituminous concrete, rolling cement concrete (RCC), and many more. These compactors are widely used for huge paving projects like highways, airport runways, dams, municipal roads, industrial grounds, and more...

1. The ergonomic, automotive style operator station helps you work comfortably and productively all day long.
2. Easy-to-read, high-visibility gauges and warning lamps keep the operator aware of critical system information.
3. Reliable and durable Cummins diesel engine, more efficient with low maintenance costs.

OPERATING WEIGHT	
Machine with Cab Kg (lb)	6,000(13,228)
Static Linear Load kg/cm (lb/in)	20.8(12)
VIBRATORY SYSTEM	
Max. Frequency Hz (vpm)	50(3,000)
Min. Frequency Hz (vpm)	40(2,400)
Nominal Amplitude mm(in)	0.5(0.02)
Centrifugal Force kN (lbf)	60(13,489)
POWER TRAIN	
Engine Make / Model	Cummins 4BTA3.9 or Rhino
Net Power kW (Hp) @ 2,200 rpm	34(45)
Displacement L (cu. In)	2.4(146)
Emissions (optional)	Tier 2 (Tier 3, Tier 4)
Lubrication	Full-flow spin-on filter
Aspiration	Natural
Air Cleaner	Under-hood, dual element dry type
Fan Drive	Belt driven
Electrical System	24 Volts with 70 Amp alternator
TRANSMISSION	
Type	Hidrostatic all-drum travel drive by full-hydraulic motors, double reduction for infinite variable speeds
Travel Speed kmh (mph)	12(7)
HYDRAULIC SYSTEM	
Pump Type	Axial piston pump, Variable displacement, Closed Center
Vibration Type	Axial piston motors, Constant displacement
System Pressure Mpa (psi)	30(4,351)
Vibration System Pressure Mpa (psi)	12(1,740)
Steering System Pressure Mpa (psi)	10(1,450)
BRAKE SYSTEM	
Service Brakes	Hydrostatic dybamic breaking
Parking Brake	Manually activated
REFILL CAPACITIES L (gal)	
Fuel Tank	120(32)
Engine Oil	10(2.6)
Hydraulic Tank	100(26)
Water Tank	550(145)

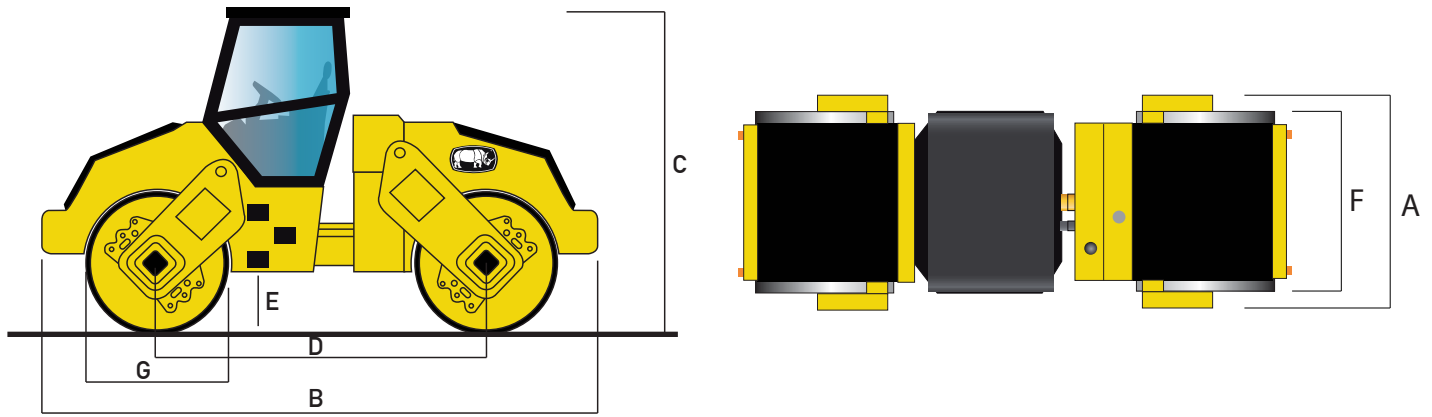

## MACHINE DIMENSIONS

A. Overall Width mm (ft)	1,550(5.1)
B. Overall Length mm (ft)	3,490(11.5)
C. Max. Machine Height mm (ft)	2,580(8.5)
D. Wheelbase mm (ft)	2,500(8.2)
E. Ground Clearance mm (ft)	280(0.9)
Outside Turning Radius mm (ft)	6,000(19.7)
Inside Turning Radius mm (ft)	3,800(12.5)
Articulation Angle	35 degrees
Gradeability	10 degrees

## DRUM DIMENSIONS

F. Drum Width mm (in)	1,350(53.1)
Drum Shell Thickness mm (in)	25(1.0)
G. Drum Diameter mm (in)	950(37.4)

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.