



REX50

EXCAVATOR






PERFORMANCE

Engine (optional)	Rhino (Yanmar 4TNV94L)
Emissions (optional)	Tier 2 (Tier 3, Tier 4)
Engine Power kw (hp)@2100rpm	36.9 (49.5)
Weight kg (lb)	5,710 (12,588)
Bucket Capacity m3	0.2
Width of Bucket mm (in)	775 (30.5)
Hydraulic Pressure Mpa	24.5
Max. Digging Force KN	37.4
Gradeability %	58
Ground Pressure Kpa	34
Speed km/h (mph)	5.1 (3.1)
Max. Hauling Force kN	44
Swing speed of Platform rpmhts	13.5

RANGE OF OPERATION

Max. Digging Height mm (ft)	5,700 (18.7)
Max. Digging Depth mm (ft)	3,935 (12.9)
Min. Turning Radius mm (in)	2,670 (105)
Max. Digging Radius mm (in)	6,380 (251)
Max. Dumping Height mm (ft)	3,380 (11.0)
Max. Digging Reach mm (ft)	6,129 (20.1)

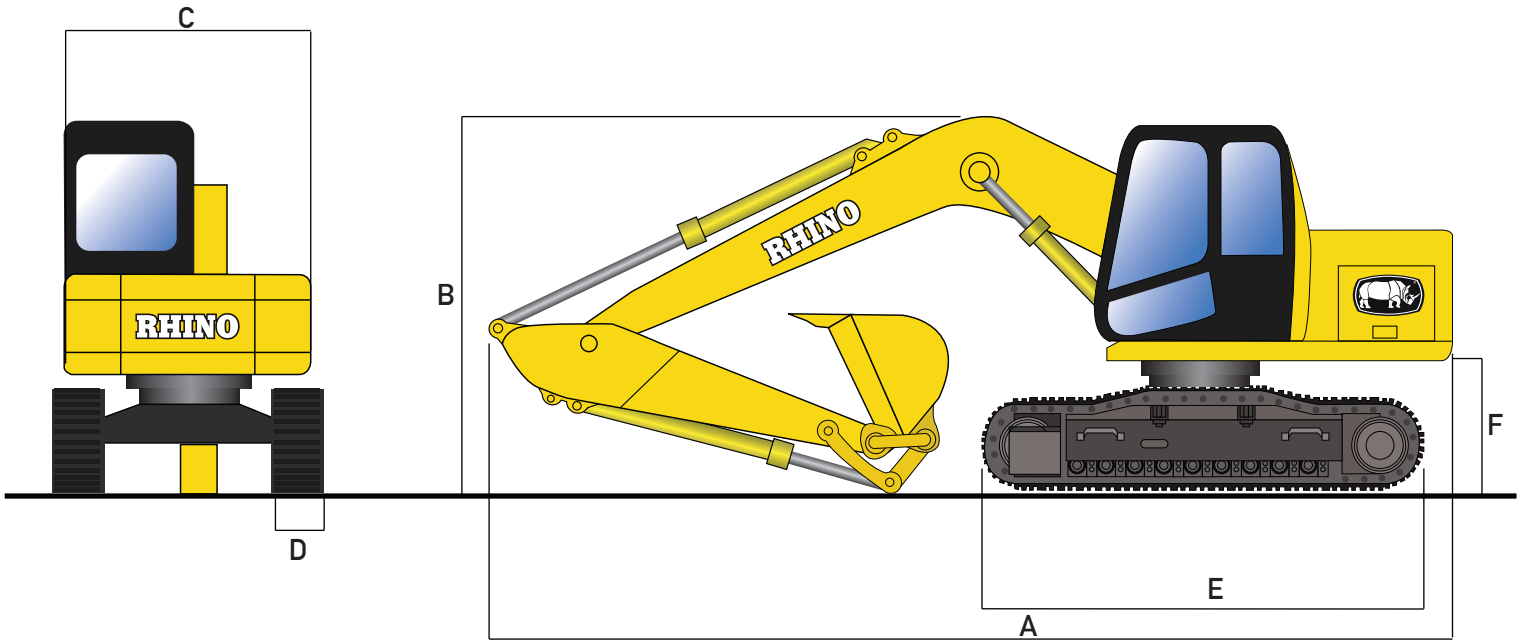

MACHINE DIMENSIONS

A. Overall Length transport mm (ft)	6,035 (19.7)
B. Overall Height	2,570 (8.4)
C. Overall Width mm (ft)	1,900 (6.2)
D. Track Width mm (in)	400 (1.3)
E. Undercarriage Length mm (ft)	2,458 (8.0)
F. Ground distance mm(ft)	360 (1.1)
Width of Platform mm(ft)	1,810 (5.9)
Platform ground distance mm(ft)	648 (5.9)
Platform tail Turning Radius mm(ft)	1,660 (5.4)

Rhino excavators come standard with the hydraulic line for attachments. Attachments include hydraulic hammers, thumb cutters, and many more.

Rhino Hydraulic Hammer Match: 714BE



Rhino Excavators can come with different types of buckets depending on work requirements

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.


OPTIONS

Rhino Excavators can come with different options like: Tier2, Tier3, Tier4 Engine, Close cab, Rock bucket, Trench bucket, Thumb cutters, and many more according to work requirements.

ATTACHMENTS

Rhino Excavators come standard with the hydraulic line for attachments.

Rhino hydraulic hammer match: 254SK

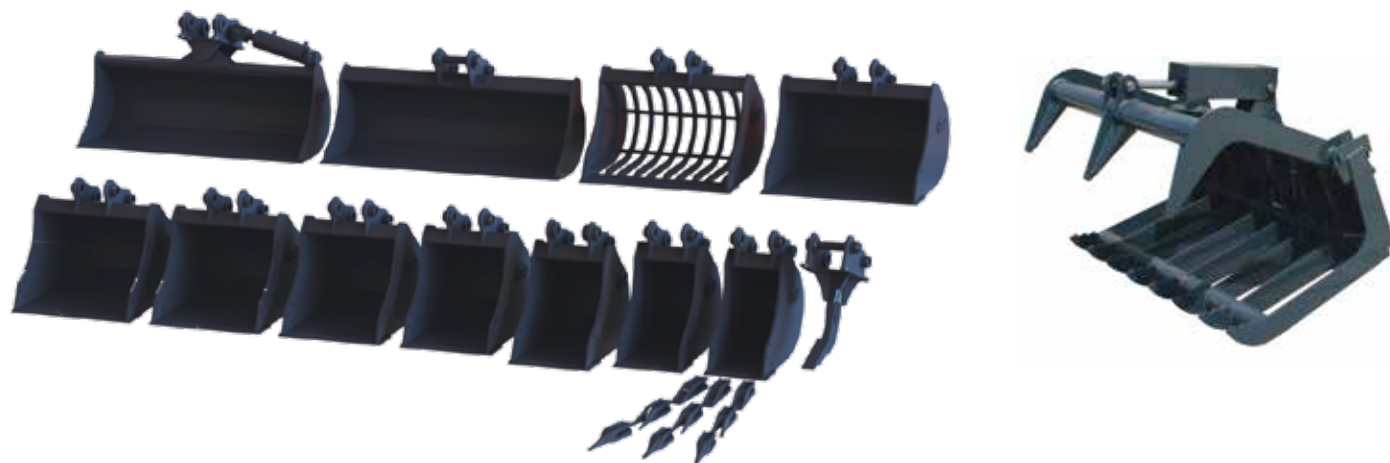

Many options buckets



Hydraulic hammers



Trenchers



Augers

and many more...

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.