

RHINO

LPG FORKLIFTS

www.rhinoeq.com

SPECIFICATIONS

2 TONS


3 TONS

3.5 TONS



	1	Model	Features	RFL200-LPG	RFL300-LPG	RFL350-LPG
DIMENSIONS	2	Rated capacity	kg (lb)	2,000 (4,409)	3,000 (6,614)	3,500 (7,614)
	3	Load center	mm (in)	500 (19.7)	500 (19.7)	500 (19.7)
	4	Power type		Gasoline /LGP	Gasoline /LGP	Gasoline /LGP
	5	Transmission		Hydraulic	Hydraulic	Hydraulic
	6	Lifting height	mm (in)	3,000 (118.1)	3,000 (118.1)	3,000 (118.1)
	7	Free lifting height	mm (in)	40 (1.6)	45 (1.8)	45 (1.8)
	8	Turning radius	mm (in)	2,400 (94.5)	2,550 (100.4)	2,575 (101.4)
	9	Overall length	mm (in)	3,485 (137.2)	3,810 (150)	3,835 (151)
	10	Overall width	mm (in)	1,160 (45.7)	1,230 (48.4)	1,230 (48.4)
	11	Overall height (mast lowered)	mm (in)	2,190 (86.2)	2,230 (87.8)	2,230 (87.8)
	12	Overall height (mast raised)	mm (in)	4,080 (160.6)	4,250 (167.3)	4,250 (167.3)
	13	Overall height (overhead guard)	mm (in)	2,165 (85.2)	2,190 (86.2)	2,190 (86.2)
	14	Fork length	mm (in)	1,070 (42.1)	1,220 (48.0)	1,220 (48.0)
	15	Fork width	mm (in)	100 (3.9)	125 (4.9)	125 (4.9)
	16	Fork thickness	mm (in)	40 (1.6)	45 (1.8)	50 (2.0)
	PERFORMANCE	17	Max. driving Speed (with/without load)	km/h (mph)	17/19 (10.6)	18/20 (11.2)
18		Max. lifting speed (with load)	mm/s (in/s)	400 (15.7)	400 (15.7)	375 (14.8)
19		Max. traction (with/without load)	kN (lbf)	14/9 (3,147)	15.5/10.5 (3,485)	16/11 (3,597)
20		Gradeability (with/without load)	%	15/20	15/20	15/20
21		Tilting angles (forward/backward)	°	6/12	6/12	6/12
ENGINE	22	Service weight	kg (lb)	3,320 (7,319)	4,250 (9,370)	4,550 (10,031)
	23	Brand		RHINO / NISSAN	RHINO / NISSAN	RHINO / NISSAN
	24	Model		BR491 / K25	BR491 / K25	BR491 / K25
	25	Power	kW (Hp)	41 (55.0)	41 (55.0)	41 (55.0)
	26	Rated speed	rpm	2,800	2,800	2,800
	27	Displacement	L (cu.in)	2 (137)	2 (137)	2 (137)
	28	No. of cylinder		4	4	4
WHEEL	29	Front overhang	mm (in)	450 (17.7)	490 (19.3)	490 (19.3)
	30	Wheel base	mm (in)	1,640 (64.6)	1,750 (68.9)	1,750 (68.9)
	31	Front tread	mm (in)	970 (38.2)	1,000 (39.4)	1,000 (39.4)
	32	Rear tread	mm (in)	970 (38.2)	970 (38.2)	970 (38.2)
	33	Front tire		7.00 - 12	28x9 - 15	28x9 - 15
	34	Rear tire		6.00 - 9	6.50 - 10	6.50 - 10

DIMENSIONS

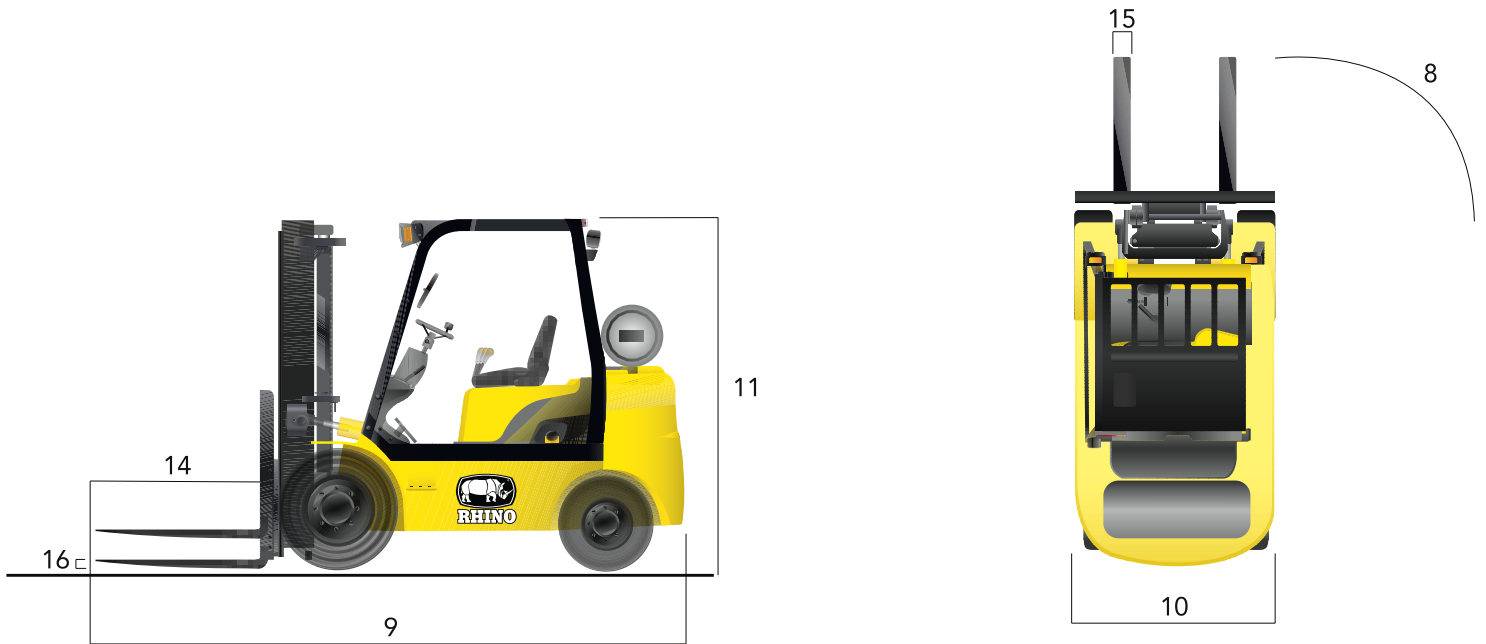

OPTIONS

- LPG and gasoline as fuel, more environmental
- Electric shift program, LCD meter
- More comfortable operation
- Streamline chassis and beautiful appearance
- High exhaust, dual air filter
- Comfortable seat for long-time operation
- For LPG/Gasoline forklift, you can choose engine, Rhino / Nissan K25
- Optional mast: 2-stage 3.3m/3.5m/4mmast; 3-stage 4.5m/5m/5.5m/6m/7.3mmast.

More options available for client demand



CUSHION TIRES



PNEUMATIC TIRES

PARTS & SERVICE

The purchase price of a truck is only a small part of its overall cost. A lift truck's cost of ownership is the largest portion of dollars spent and includes such elements as periodic maintenance, unscheduled repairs, tires, brakes and fuel costs. The Rhino Equipment engineers focused on cost savings with additional engine and transmission options, world-class serviceability and exceptional dependability. The Rhino forklifts offers substantial operating cost savings over the competition.

The easy to remove floor plate requires no tools to remove and offers complete access to the powertrain. Simplified daily checks and reduced service requirements lead to lower maintenance costs.



Rhino Forklifts have great serviceability, reducing labor costs associated with periodic maintenance and unscheduled repairs. We make sure that all parts are available to our customers through our distribution centers; which are strategically located around the world. We provide a full range of original equipment and aftermarket parts that help maintain our customer's machine uptime.

