



**RWL102**

**WHEEL LOADERS**



# More power and control mean more productivity.



If you've got maximum productivity in mind, the RWL Series Loaders should be at the top of your list. But it's not just their big torque reserves that make them such impressive performers. Joystick control provide smooth, near-effortless control. Rhino hydraulics sense the load and deliver the flow needed for smooth combined functions and fast work cycles.



1. Control panel provides access to a machine info, brake and throttle pedals are conveniently positioned.
2. Joystick provides convenient operation in truck loading, delivering smooth control for load and carry applications, as well.
3. Multiple attachments increases productivity in all kinds of terrain.




# Parallel lift that's simply unparalleled



Rhino Equipment Attachments designs, maximizes parallel lift loader advantages for stronger breakout forces, delivering more efficient material handling to your operation.

1. If it's traditional tool carrier you want, opt for a RWL102 Tool carrier. Its linkage levels the load throughout the lift cycle and provides unrestricted visibility to the coupler.
2. The RWL102 Wheel Loaders deliver both powerful digging forces and parallel lift. Impressive torque throughout the entire dump and rollback range enables these attachment loaders to excel at a wide variety of material - handling tasks.
3. RWL102 Attachments makes RWL series Loaders more versatile by picking up a broad range, and other attachments from the comfort of the cab.

# Save your money, not your service techs.

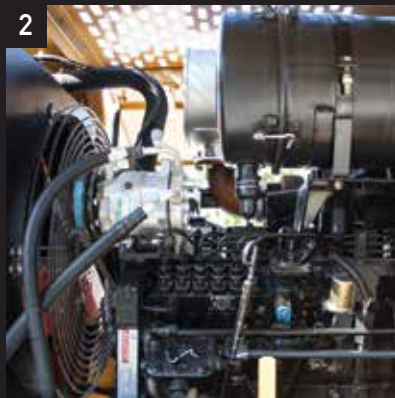

1. Control Panel and joystick controls provide a comfortable and ergonomic space to increase productivity and efficiency at the work site

2. Reliable and durable Cummins diesel engine, more efficient with low maintenance costs.

3. High quality hose products mean fewer hose changes. Rhino Equipment offers a broad line of high, medium and low-pressure hoses and couplings that are engineered and tested far beyond industry standards for top performance and long life.

4. Rhino cylinders offer superior strength and dent resistance deliver longer component life and reduced risk of system contamination. Rhino Cylinders and Rods are designed to allow for a variety of service / repair options.



## ENGINE

Model	Cummins / 6BT5.9-C or Rhino	
Emissions (optional)	Tier 2 (Tier 3, Tier 4)	
Cylinders	6	
Displacement L (cu. In)	5.9(360)	
Net Power kW (Hp) @ Rated rpm	87(117)@2,200 rpm	
Net Peak Torque Nm (lb-ft) @ Rated rpm	436(322)@1,600 rpm	
Net Torque Rise	15%	
Fuel System	Direct Injection	
Lubrication	Full-flow spin-on filter	
Aspiration	Turbocharged	
Air Cleaner	Under-hood, dual element dry type, restriction indicator on filter housing for service	
Fan Drive	Belt driven	
Electrical System	24 Volts with 70 Amp alternator	
Batteries (2-12 volt)	120A	

## TRANSMISSION

Type	Powershift	
Torque Converter	Single-stage, Dual-phase, Quad-element torque	
Operator Interface	Steering column lever for two gears forward and one in reverse	
Shift Modes	Manual activation (Forward: 1st and 2nd; Reverse: 1st)	
Maximum Travel Speeds (with 17.5 R 25 tires)	Forward	Reverse
1st Gear km/h (mph)	7(5)	8(5)
2nd Gear km/h (mph)	16(10)	

## AXLES/BRAKES

Final Drives	Heavy duty inboard-mounted planetary	
Differentials	Helical bevel gear	
Rear Axel Oscillation (with 17.5 R 25 tires)	25 degrees (12.5 degrees each direction)	
Service Brakes	Pneumatically assisted, hydraulically actuated, four wheels disk brake	
Parking Brake	Manually activated, drum mounted on front output shaft	

## TIRES/WHEELS

	Tread Width mm (in)	Width Over Tires mm (in)
17.5 R 25 12 Ply	1,900(74.8)	2,350(92.5)
Pressure Mpa (psi)	0.3(43)	

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.



### REFILL CAPACITIES L (gal)

Fuel Tank	130(34)
Cooling System	15(4)
Engine Oil	13.5(4)
Transmission Fluid	35(9)
Axle Oil (Front and Rear, each)	11(3)
Hydraulic Tank	120(32)
Brake System (Front and Rear Booster Pump, each)	0.5(0.1)

### HYDRAULIC SYSTEM/STEERING


Pump (Loader and Steering)	Gear Pump, variable displacement, closed-center
Max. Rated Flow at 2,200 rpm L/min (gpm)	100(26)
System Relief Pressure (Loader and Steering) Mpa (psi)	16(2,321)
Loader Controls	Dual-multiway valve, joystick control

### STEERING

Type	Articulated frame, fully hydraulic
Articulation Angle	35 degrees
Turning Radius (measured to centerline of outside tire) mm (ft)	4,950(16.2)
Hydraulic Cycle Times	Z-Bar
Raise sec.	5.1
Dump sec.	1.1
Lower sec.	3.0
Total sec.	9.2

Loader operating information is based on machine with identified linkage and standard equipment, standard tires, full fuel tank, and 79-kg (175 lb.) operator. This information is affected by changes in tires, ballast, and different attachments.

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

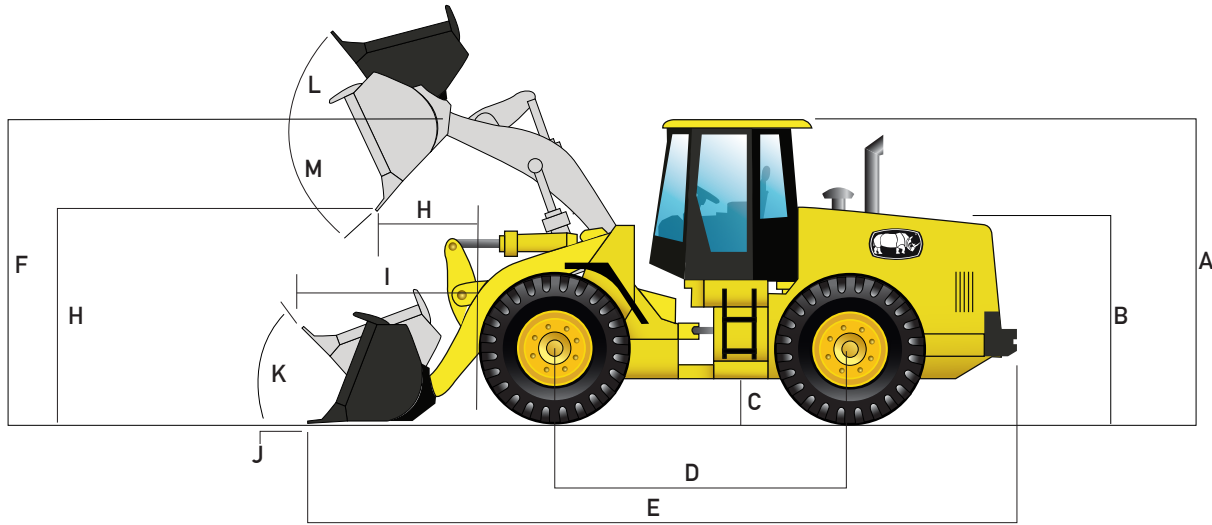

## DIMENSIONS WITH BUCKET

1.8 m<sup>3</sup> (2.5 cu. Yd) General purpose with Bolt on teeth

A	Height to Top of Cab and Canopy mm (ft)	3,120(10.2)
B	Hood Height mm (ft)	3,010(9.9)
C	Ground Clearance mm (ft)	370(1.2)
D	Wheel base mm (ft)	2,750(9.0)
E	Overall Length, Bucket on Ground mm (ft)	6,863(22.5)
F	Height to Hinge Pin, Fully Raised mm (ft)	3,732(12.2)
G	Dump Clearance, 45 degree Full Height mm (ft)	2,850(9.4)
H	Reach, 45 degree Dump, Full Height mm (ft)	1,030(3.4)
I	Reach, 45 degree Dump, 2,130mm (7ft) Clearance mm (ft)	1,470(4.8)
J	Max. Digging Depth mm (ft)	90(0.3)
K	Max. Rollback at Ground Level	49 degrees
L	Max. Rollback, Boom Fully Raised	57 degrees
M	Max. Bucket Dump Angle, Fully Raised	45 degrees
	Loader Clearance Circle, Bucket Carry Position mm (ft)	11,200(36.7)

## SPECIFICATIONS WITH BUCKET

	Capacity, Heaped m <sup>3</sup> (cu. Yd)	1.8(2.4)
	Capacity, Struck m <sup>3</sup> (cu. Yd)	1.4(1.8)
	Bucket Weight Kg (lb)	1,020(2,249)
	Bucket Width mm (ft)	2,460(8.1)
	Breakout Force Kg (lb)	9,600(21,164)
	Tipping Load, Straight Kg (lb)	9,020(19,886)
	Tipping Load, 35 degree Full Turn Kg (lb)	8,135(17,935)
	Operating Weight Kg (lb)	10,200(22,487)

## BUCKET OPTIONS

Bucket Capacities 1.4m<sup>3</sup> - 2.8m<sup>3</sup> (1.8 cu. Yd - 3.7 cu. Yd)

Buckets can be custom made depending on client requirements such as a bigger bucket for lighter material handling or clam buckets or among many other options.

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.




## ATTACHMENTS



Material Handling Bucket



Waste Bucket

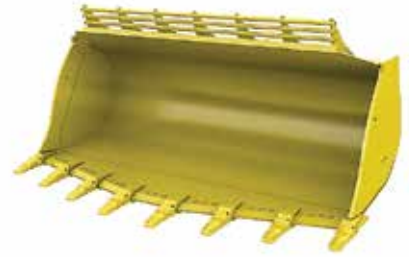

Rock Bucket



Slag Bucket



Multi-Purpose Bucket



Multi-Purpose Blades



Grapple Forks



Lumber Forks



Palet Forks



The attachments shown are for reference only; the final product may be different from the images shown.

For more options contact your nearest dealer.

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

[www.rhinoeq.com](http://www.rhinoeq.com)