



HYDRAULIC HAMMERS




Skid steer



Backhoe / Mini-excavator



Excavator

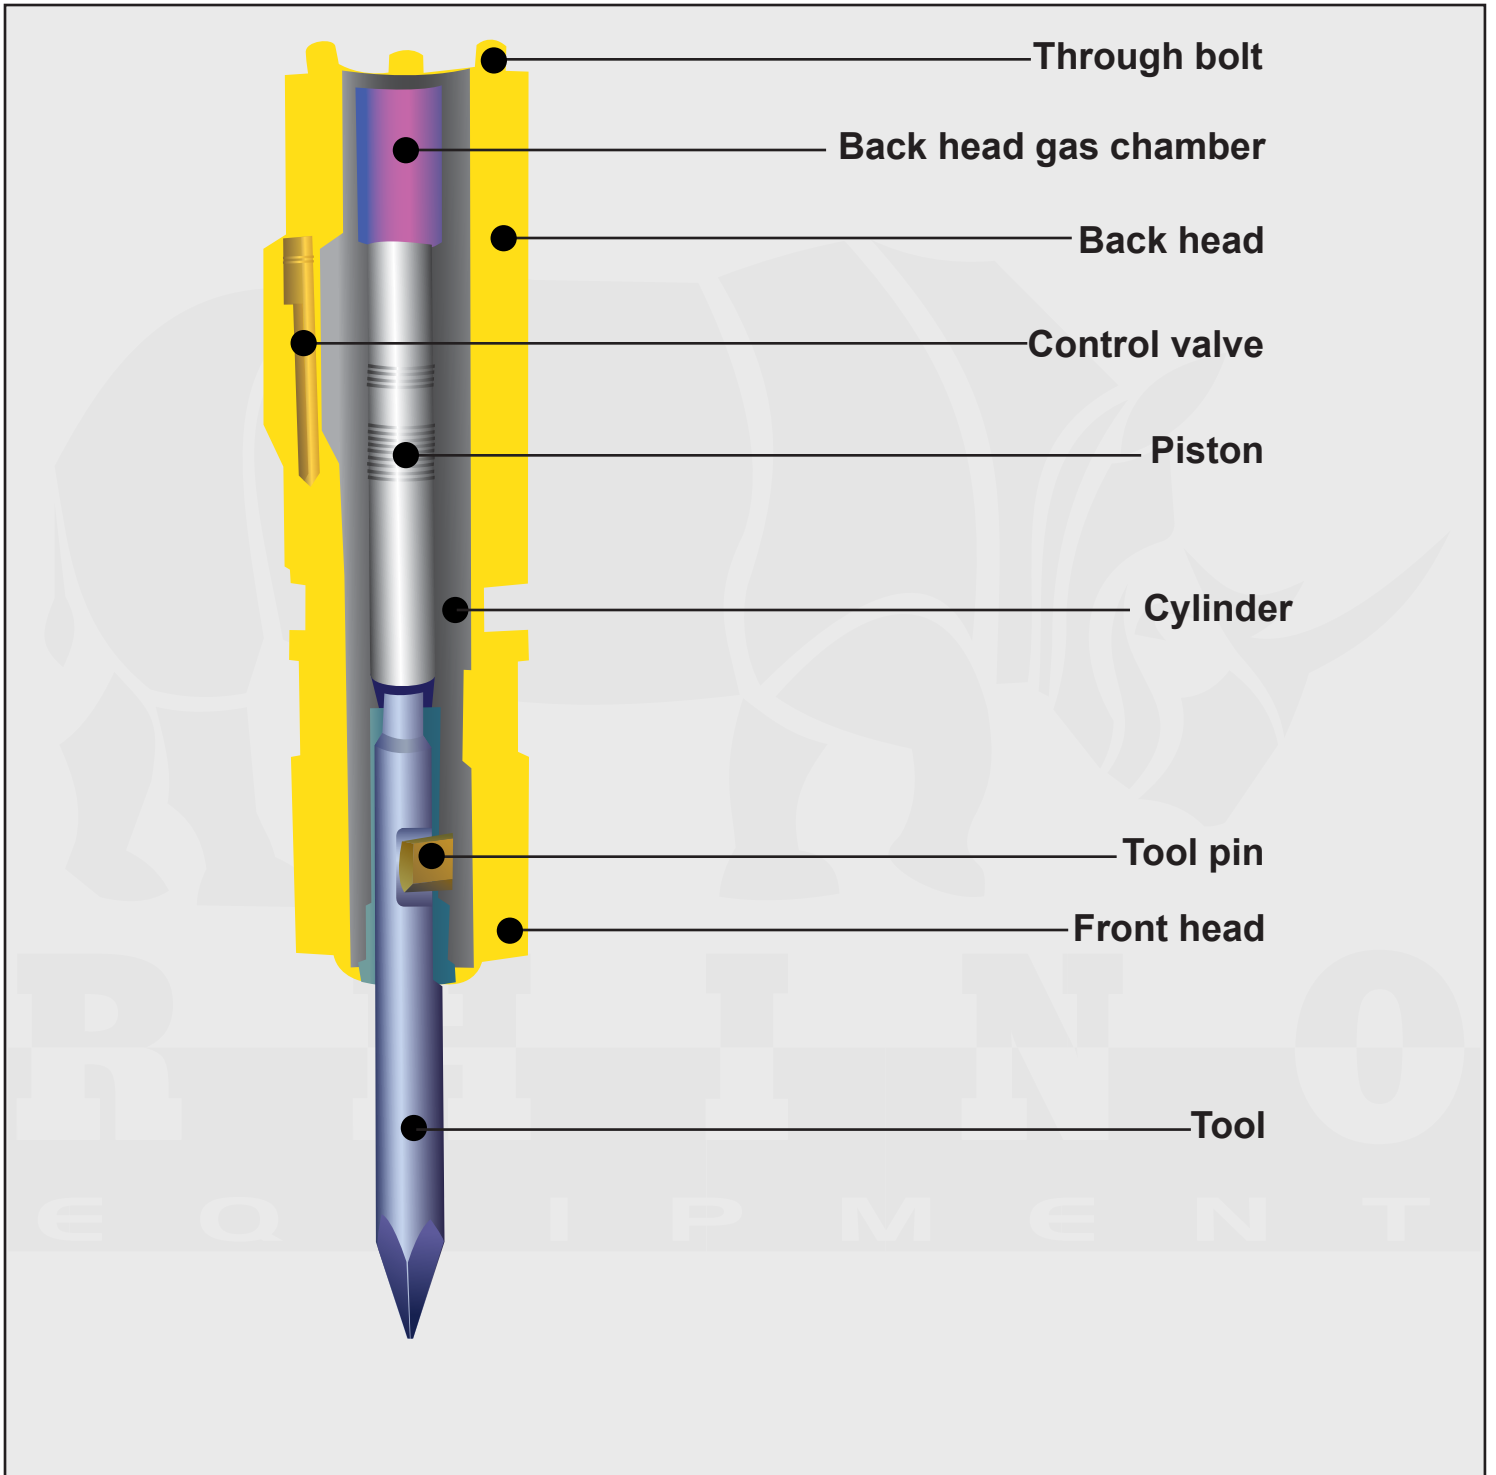

Tool Choice



Moil point

Mining applications,
Universal tool



In-line chisel

Digging or narrow,
trenching & concrete demolitions

| Model | | Skid Steer | |
|---------------------------|-----------|--------------|--------------|
| | | 254 SK | 47 SK |
| Equipment Class | Kgs. | 2500 - 4500 | 4000 - 7000 |
| | Lbs. | 5500 - 10000 | 8800 - 15400 |
| Operational Weight | Kgs. | 150 | 275 |
| | Lbs. | 331 | 606 |
| Weight of Main Body | Kgs. | 86 | 151 |
| | Lbs. | 190 | 333 |
| Height (Incl. Tool) | mm | 1342 | 1600 |
| | inch | 53 | 63 |
| Required Oil / Flow Range | l/min | 25 - 40 | 30 - 45 |
| | gal/min | 6.5 - 10.5 | 8.0 - 12.0 |
| Operating Pressure | bar | 90 - 120 | 95 - 130 |
| | psi | 1305 - 1740 | 1378 - 1885 |
| Impact Range | bmp | 600 - 1100 | 500 - 900 |
| Rod / Chisel | mm | 53 | 68 |
| | inch | 2.09 | 2.68 |
| Hose Diameter | inch | 1/2 | 1/2 |
| Impact Energy Class | Kg / m | 33 | 70 |
| | joule | 320 | 690 |
| | ft x lb | 236 | 509 |
| Back Head Gas Pressure | bar / psi | 16 - 232 | 16 - 232 |



Skid Steer
RS50-s
RS60

| Model | | Backhoe / Miniexcavator | |
|---------------------------|-----------|-------------------------|---------------|
| | | 47 BE | 714 BE |
| Equipment Class | Kgs. | 4000 - 7000 | 7000 - 14000 |
| | Lbs. | 8800 - 15400 | 15400 - 31000 |
| Operational Weight | Kgs. | 275 | 500 |
| | Lbs. | 606 | 1102 |
| Weight of Main Body | Kgs. | 151 | 280 |
| | Lbs. | 333 | 617 |
| Height (Incl. Tool) | mm | 1600 | 2101 |
| | inch | 63 | 83 |
| Required Oil / Flow Range | l/min | 30 - 45 | 45 - 85 |
| | gal/min | 8 - 12 | 12 - 22.5 |
| Operating Pressure | bar | 95 - 130 | 130 - 150 |
| | psi | 1378 - 1885 | 1885 - 2176 |
| Impact Range | bmp | 500 - 900 | 400 - 800 |
| Rod / Chisel | mm | 68 | 85 |
| | inch | 2.68 | 3.35 |
| Hose Diameter | inch | 1/2 | 3/4 |
| Impact Energy Class | Kg / m | 70 | 133 |
| | joule | 690 | 1300 |
| | ft x lb | 509 | 959 |
| Back Head Gas Pressure | bar / psi | 16 - 232 | 16 - 232 |



Backhoe / Miniexcavator
RBH70
REX35
REX70
REX130



HYDRAULIC HAMMERS

| Model | | Excavator | | |
|---------------------------|-----------|---------------|---------------|----------------|
| | | 1826 EX | 2735 EX | 3255 EX |
| Equipment Class | Kgs. | 18000 - 26000 | 27000 - 35000 | 32000 - 55000 |
| | Lbs. | 40000 - 57320 | 60000 - 77000 | 70500 - 121250 |
| Operational Weight | Kgs. | 1740 | 2420 | 3020 |
| | Lbs. | 3836 | 5335 | 6658 |
| Weight of Main Body | Kgs. | 750 | 950 | 1400 |
| | Lbs. | 1654 | 2094 | 3087 |
| Height (Incl. Tool) | mm | 2327 | 2500 | 2740 |
| | inch | 92 | 98 | 108 |
| Required Oil / Flow Range | l/min | 130 - 150 | 150 - 190 | 190 - 250 |
| | gal/min | 34 - 40 | 40 - 50 | 50 - 65 |
| Operating Pressure | bar | 160 - 180 | 160 - 180 | 160 - 180 |
| | psi | 2321 - 2611 | 2321 - 2611 | 2321 - 2611 |
| Impact Range | bmp | 400 - 500 | 300 - 450 | 250-400 |
| Rod / Chisel | mm | 135 | 150 | 160 |
| | inch | 5.32 | 5.91 | 6.30 |
| Hose Diameter | inch | 1 | 1 | 1 1/4 |
| Impact Energy Class | Kg / m | 459 | 714 | 1020 |
| | joule | 4500 | 7000 | 10000 |
| | ft x lb | 3319 | 5163 | 7376 |
| Back Head Gas Pressure | bar / psi | 6 - 87 | 6 - 87 | 9 - 131 |



Excavator

REX210
REX330
REX360
REX450
REX700



- We have hydraulic hammer attachments for all types of industrial equipment such as construction, mining, demolition, etc.
- Rhino standards are famous for its high quality material and extra precise work
- Delivers from 236 Lbs to 7302 Lbs-ft of impact energy.