



RCT15-H

TANDEM VIBRATORY ROLLER



TECHNICAL SPECIFICATIONS

| | |
|---------------------------------|-----------------------------|
| Engine | Kohler or Briggs & Stratton |
| Power kW (Hp) @ rpm | 17(23)@2,800 |
| Engine Type | Gasoline |
| Travel Speed Forward Km/h (mph) | 8(5) |
| Travel Speed Reverse Km/h (mph) | 8(5) |
| Gradeability % | 30 |
| Drive Type | Hydraulic |

VIBRATION SYSTEM

| | |
|------------------------------|-------------|
| Vibration Type | Hydraulic |
| Vibration Frequency Hz (vpm) | 65 (3,900) |
| Exciting Force kN | 30 (1,800) |
| Starting Mode | Electric |

REFILL CAPACITIES L (GAL)


| | |
|---------------|----------|
| Water Tank | 100 (26) |
| Hydraulic Oil | 60 (15) |

WEIGHT

| | |
|------------------------------|---------------|
| Operating Weight Kgs (lbs) | 1,500 (3,306) |
|------------------------------|---------------|


DIMENSIONS

| | |
|-------------------------|------------|
| A - Drum width mm (in) | 900 (36) |
| B - Drum Length mm (in) | 560 (22) |
| C - Length mm (in) | 2,336(93) |
| D - Width mm (in) | 1,066 (42) |
| E - Height mm (in) | 1,753 (69) |

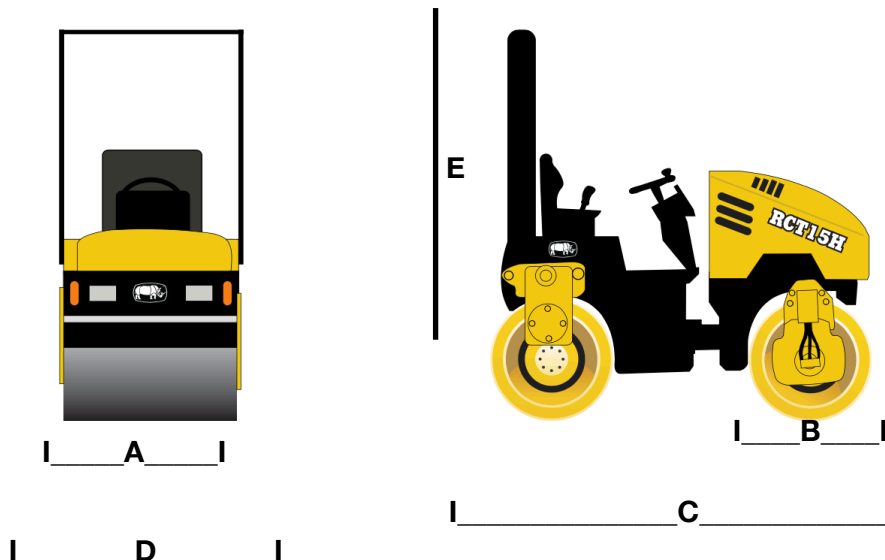

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

The All Terrain Equipment For The Heaviest Jobs

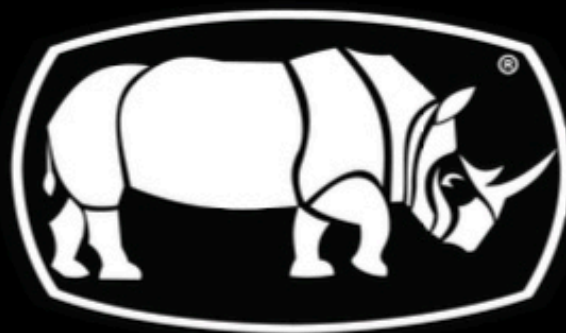

RHINO

www.rhinoeq.com