



**RT50**

**OFF HIGHWAY TRUCK**





# More Power and control mean more productivity.



Make your operators more productive and dramatically improve the economics of your haul fleet.

With your input, we have designed and manufactured a truck that is reliable, economical and offers comfort, confidence and control for your operators.

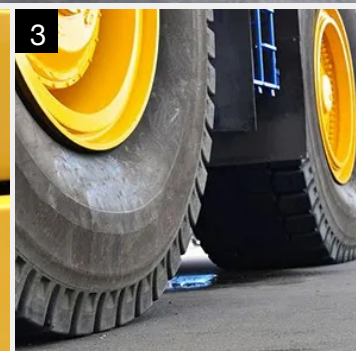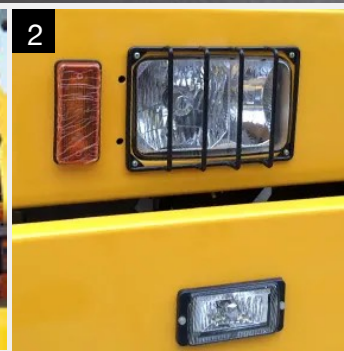

1. Be sure to employ premium-quality Air Filters. you can guarantee that only pure air is used for the combustion process.
2. Back-up light, rear, engine compartment light, head lights, halogen, side working lights, stop and tail lights, turn signal with hazard switch.
3. Rugged design and industrial styling make it ideal for hauling heavy loads or working in extreme conditions.

## ENGINE

Emission Rating (optional)	Tier 2 (Tier 3, Tier 4)
Engine Make/ Engine Model	Cummins / QSX15-C525 or Rhino
Bore x Stroke mm	137x169
Displacement L (cu. In)	15(915)
Gross Power kW (Hp) @ 2,100 rpm	392(526)
Max Torque Nm (ft-lb) @ 1,400 rpm	2,440(1,800)
Net Torque Rise	37%
Aspiration	Turbocharged
Type	6 cylinders, 4 stroke, in line

## DRIVE AXLE

Central reduction	Heavy duty single stage spiral bevel gear
Diferential Ratio	3.385:1
Planetary Gear reduction in Wheel Hub Ratio	5.684:1
Half Shaft	Full floating
Total Ratio of Rear Axle	19.24:1

## TRANSMISSION

Allison H5610AR: electronically controlled automatic transmission with CEC 2 Shift Manager Program, with integral TC890 torque converter, integrated hydraulic retarder and planetary gearing.

Automatic lock up in all ranges

Speed Forward Ratio: 1st, 2nd, 3rd, 4th, 5th, 6th, reverse	4.00, 2.68, 2.01, 1.35, 1.00, 0.67, 5.15
--	--

## MAINTENANCE WORK VOLUME

Cooling System lt	150
Engine Crankcase lt	45
Hydraulic System lt	450
Transmission and Torque Converter lt	68
Axle lt	210
Fuel Tank lt	480

## STEERING

Type	Full Hydraulic power steering system
Actuation	Two double acting hydraulic cylinders and shock absorbers to cushion shocks loads on the system
Emergency Steering	Accumulator provides power
Min. turning radius m(ft)	10.5(34.4)

## SUSPENSION

Front Suspension: independent self-contained nitrogen/oil suspension units. Front suspension cylinders bolted and keyed directly to main frame members. Pistons act as front wheel king pins maintaining correct degree of camber.

Rear Suspension: variable rate nitrogen /oil cylinders with A-frame and lateral stabilizer bar.

Front suspension: stroke mm(in)/pressure Mpa(psi)	275(11)/2.13(309)
Rear suspension: stroke mm(in)/pressure Mpa(psi)	178(7)/1.09(158)

## BRAKES

Service	All hydraulic brake system
Front	Dry disc
Rear	Oil cooled, multiple disc, completely sealed from dirt and water
Parking	Rear brakes, sprigs loaded opposing piston on disc pack, hydraulic released
Retarder	Transmission integrated

## TYRES

Standard	21.00 - 35 (36PR)-4
Rim Size	15.00 - 35 in

## BODY

V-type structure, body wear surface are high hardness abrasion resistant steel of yield strength.

Thickness: Floor, Side, Front mm	16,10,12
Capacity Struck m3	22
Capacity Headped (2:1) m3	28

## ELECTRICAL SYSTEM

Single Cable, negative ground voltage rating 24V.

## FRAME

Fabricated from high tensile steel and cast iron members at critical points

## HOIST

Twin three stage double acting cylinders mounted on the outer chassis frame

Max. Pressure Mps(psi)	25(3,626)
Max. Raising Angle	60°
Raising Time	13s
Lowering Time	9s


## CAB

All steel construction, mounted at the left hand side with adjustable seat, thermal and noise insulated. Instrument panel with gauges, warning and indicator for ease of operation, automotive safety glass all round for maximum operator protection.


## OPERATING WEIGHTS

Nominal Vehicle Weight kg (lbs)	35,890(79,124)
Gross Vehicle Weight kg (lbs)	82,000(180,779)
Payload kg (lbs)	45,000(99,208)
Chassis, with hoists kg (lb)	27,080(59,701)
Body standard kg (lb)	8,810(19,422)
Weight Distribution:	
Empty Front Axle	49%
Loaded Front Axle	33%
Empty Rear Axle	51%
Loaded Rear Axle	67%


# DIMENSIONS

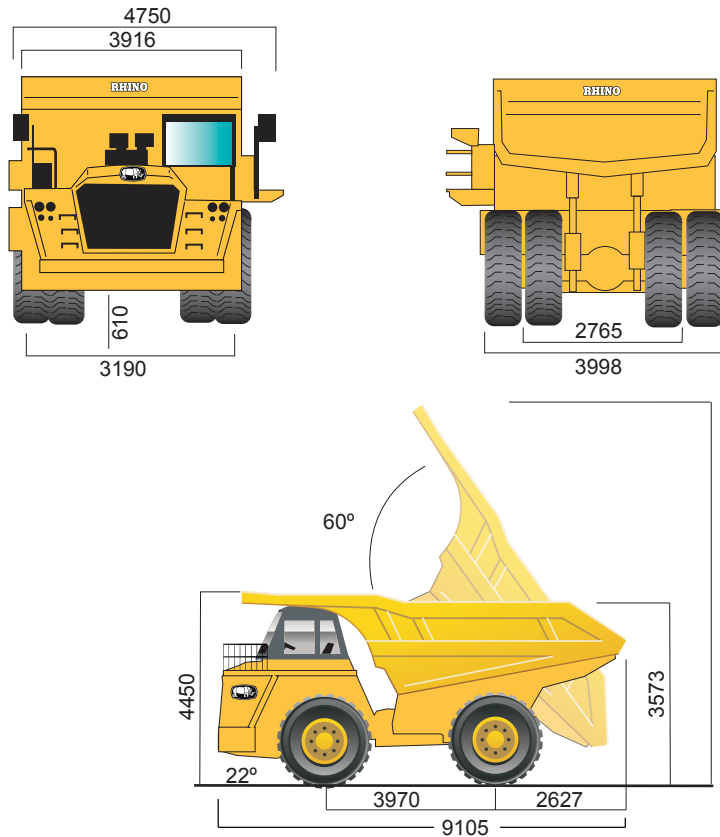

## Gradeability

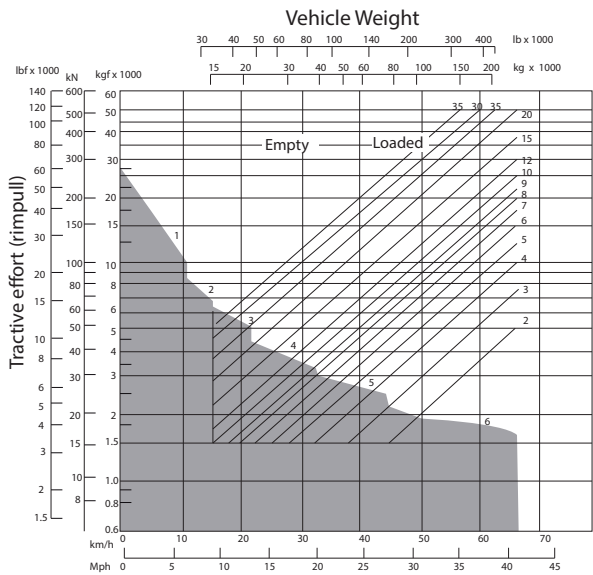

## Retardation

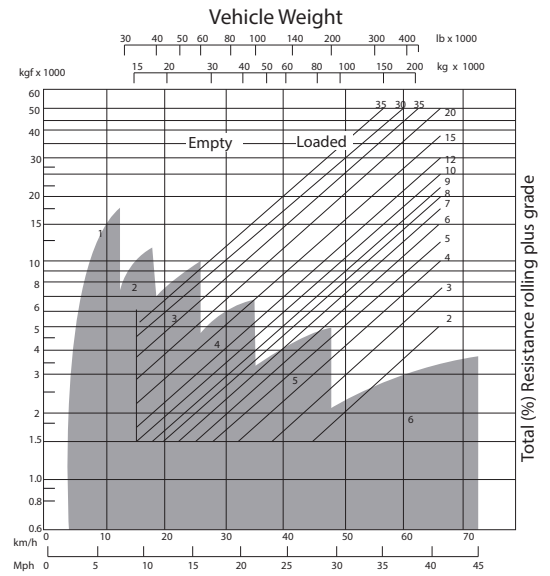

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

