



REX70

EXCAVATOR



Unprecedented precision and ease of operation.



This Rhino excavator is loaded with enhancements that not only increase productivity and uptime, but lower daily operating costs, too. A high-efficiency “on-demand” cooling system, advanced multifunction monitor, and productivity modes to allow you to choose your digging style headline the long list of advances.



1. Level climate-control system with automotive-style adjustable louvers helps keep the glass clear and the cab comfortable.
2. LCD monitor provide intuitive access to a wealth of information and functions.
3. Ergonomically correct short-throw pilot levers provide smooth, predictable fingertip control with less movement or effort.

ENGINE

Engine Make / Engine Model	Cummins / 4BT3.3 or Rhino
Emissions (optional)	Tier2(Tier3, Tier4)
Cylinders	4
Displacement L (cu. In)	3.3(201)
Net Power kW (Hp) @2,350 rpm	45(60)
Fuel System	Direct Injection
Aspiration	Naturally Aspirated

COOLING

Fan Drive	Belt Driven
-----------	-------------

POWERTRAIN

Type	Dual speed mode for tracks on-dash one-button activation
Max. Travel Speeds	
Low	3(2)
High	5(3)

HYDRAULICS

Type	Open center, load sensing, two variable-displacement axial piston pumps
Pressure Mpa (psi)	28(3.989)
Max. Flow L/min (gpm) (each)	154(41)
Power Boost Mpa (psi)	29(4.206)
Control	2 Pilot levers, low-effort hydraulic controls with horn and boost buttons

CYLINDERS

	Bore	Rod Diameter	Stroke
Boom (2) mm (in)	115(4.5)	65(2.6)	885(34.8)
Arm (1) mm (in)	95(3.7)	60(2.4)	900(35.4)
Bucket (1) mm (in)	85(3.3)	55(2.2)	730(28.7)

ELECTRICAL

Number of Batteries	2
Voltage	24 volts
Alternator Rating	70A
Lights	4 Front lights, 1 Rear light

UNDERCARRIAGE

Carrier Rollers (each side)	1
Track Rollers (each side)	5
Shoes (each side) Triple Semi-Grousers	40
Adjustment	Hydraulic
Guides	Front Idler
Chain	Sealed and lubricated

GROUND PRESSURE

Triple Semi-Grouser (500mm) (20in) Kpa (psi)	30(4.4)
--	---------

SWING MECHANISM

Speed rpm	10
-----------	----

REFILL CAPACITIES L (gal)


Fuel Tank	66(17)
Cooling System	8(2)
Engine Oil	11.7(3)
Hydraulic Tank	60(16)
Swing Drive	5(1)
Final Drive Case (each)	70(18)

OPERATING WEIGHTS

With full fuel tank, 79kg (175lb) operator, 0.17m³ (0.22cu.Yd) general purpose bucket, 350mm (13.8in) tracks and 1.450mm (4.8ft) arm

Base Weight kg (lb)	6,800(14,991)
---------------------	---------------


Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

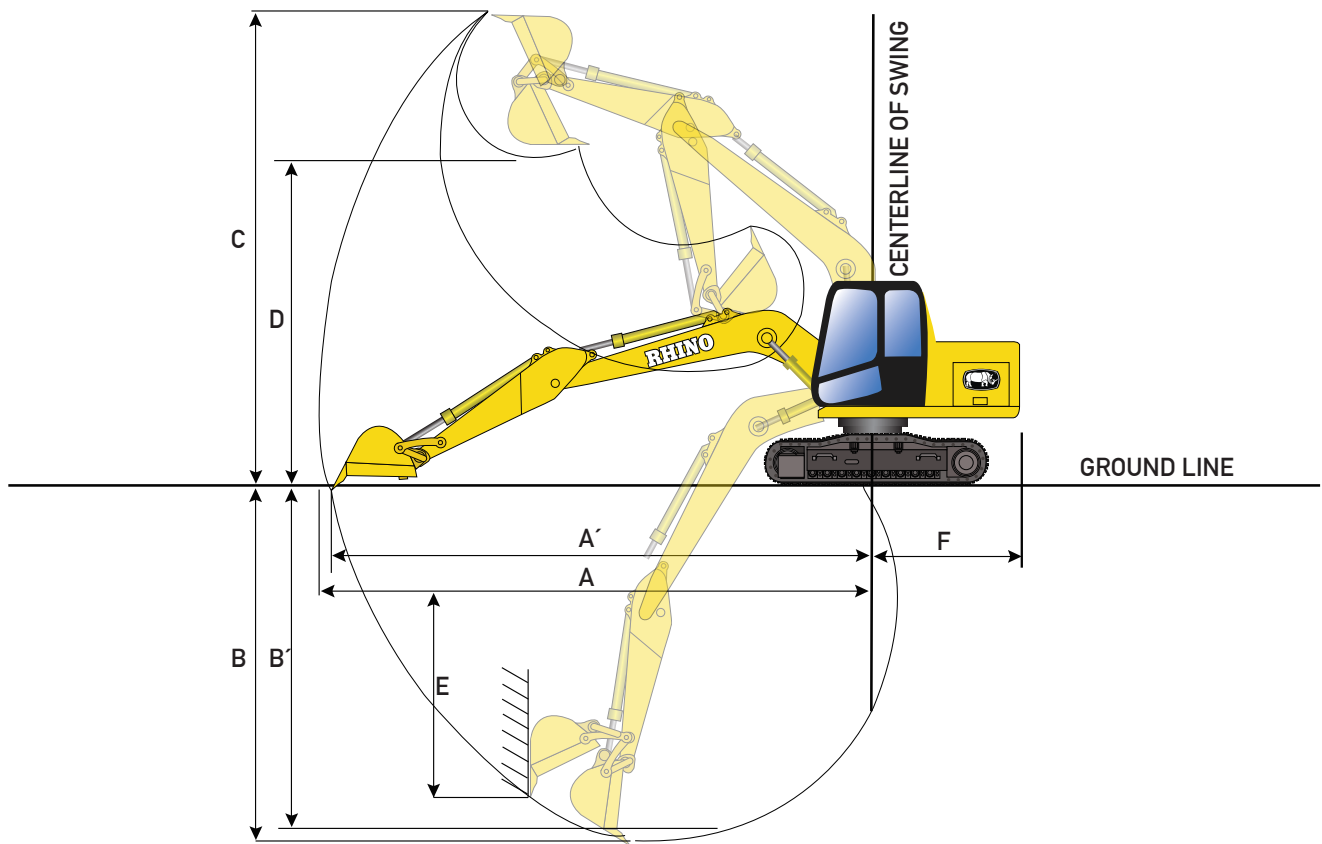

OPERATING DIMENSIONS

Arm Length mm (ft)	1,650(5.4)
Arm Digging Force kN (lb)	33(7,419)
Bucket Digging Force kN (lb)	53(11,847)
Lift Over End at 15' Radius, Ground Level kg (lb)	3,170(6,989)
Lift Over Side at 15' Radius, Ground Level kg (lb)	1,925(4,244)
A. Max. Reach mm (ft)	6,330(20.8)
A'. Max. Reach at Ground Level mm (ft)	6,180(20.3)
B. Max. Digging Depth mm (ft)	4,038(13.2)
B' Max. Digging Depth at 2,440mm (8ft) Falt Bottom mm (ft)	3,950(13.0)
C. Max. Cutting Height mm (ft)	7,165(23.5)
D. Max. Dumping Height mm (ft)	5,068(16.6)
E. Max Vertical Wall mm (ft)	3,505(11.5)
F. Tall Swing Radius mm (ft)	1,755(5.8)

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

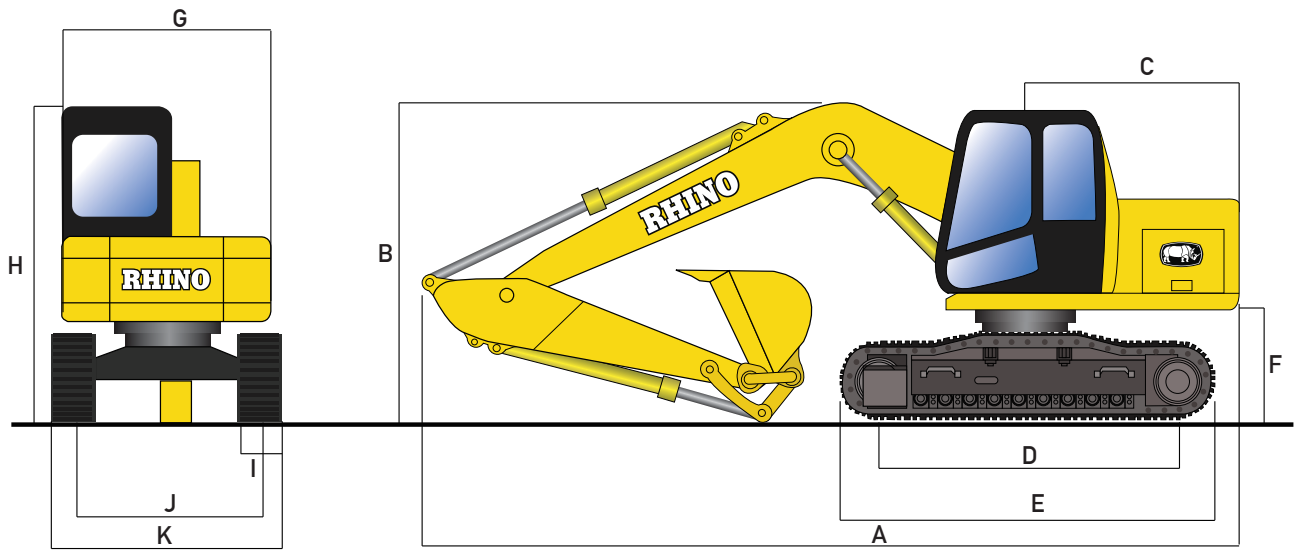

MACHINE DIMENSIONS

A. Overall Length Transport mm (ft)	6,100(20.0)
B. Overall Height with 1,650mm (5.4ft) arm mm (ft)	2,515(8.3)
C. Swing Radius mm (ft)	1,755(5.8)
D. Length of Track on Ground mm (ft)	2,130(7.0)
E. Undercarriage Length mm (ft)	1,757(9.0)
F. Counterweight Clearance mm (ft)	760(2.5)
G. Upper-structure Width mm (ft)	2,198(7.2)
H. Cab Height mm (ft)	2,630(8.6)
I. Track Width mm (ft)	500(19.7)
J. Gauge Width mm (in)	1,700(5.6)
K. Overall Width with Triple Semi-Grouser 500mm (20in) shoes mm (ft)	2,198(7.2)

ATTACHMENTS

Rhino Excavators come standard with the hydraulic line for attachments, they include hydraulic hammers and many more.

Rhino Hydraulic Hammer Match: 714BE




Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

OPTIONS

Rhino Excavators can come with different options like: Tier2, Tier3, Tier4 Engine, Close cab, Rock bucket, Trench bucket, Thumb cutters, and many more according to work requirements.

ATTACHMENTS

Rhino Excavators come standard with the hydraulic line for attachments.

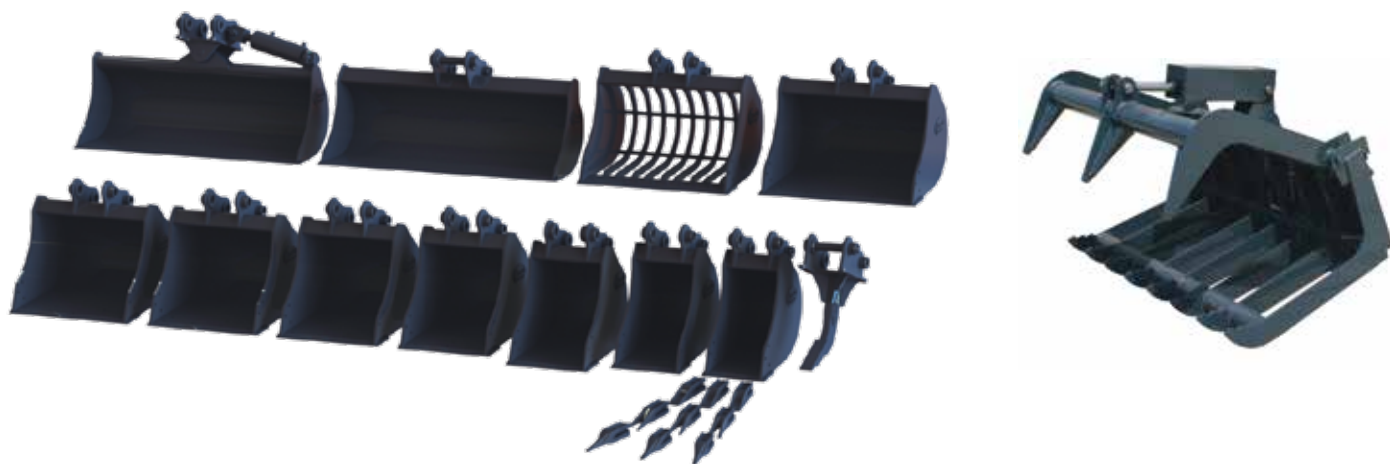

Many options buckets



Hydraulic hammers



Trenchers



Augers

and many more...

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.