

FULL RANGE MACHINERY



Mining • Construction • Demolition • Waste • Paving • Agriculture • Power Generation



www.rhinoequipment.us
info@rhinoequipment.us



TABLE OF CONTENTS



WHEEL LOADERS, MOTORGRADERS

4



EXCAVATORS, BULLDOZERS

5



WHEEL EXCAVATORS, BACKHOES

6



WHEEL DOZERS, PIPELAYERS, TRACK LOADERS

7



SKID STEERS, TRUCKS

8



COLD PLANERS, ASPHALT PAVERS

9



TANDEM ROLLERS, PNEUMATIC ROLLERS

10



SOIL COMPACTORS, VIBRATORY COMPACTORS

11



FORKLIFTS, REACH STACKERS

12



LIGHT TOWERS, ATTACHMENTS

13



TOWER CRANES, HAMMERS

14



POWER GENERATORS

15



MINING

16



AGRICULTURE

17



TELEHANDLERS

18



Rhino Equipment® is the result of the collaboration of various private equity business groups with more than 25 years of experience in manufacturing, production, and commercialization of machines for construction, demolition, mining, and power generation with applications and acceptance around the globe.



In our assembly plants we apply the best practices, standard processes, and global standards to improve safety, quality, speed, and cost. This allows us to make products more efficiently and meet deadlines more consistently, and to have a better response from the time an order arrives until the product is delivered.



Your Rhino® dealer provides peace of mind with expert parts and service support. Factory-trained technicians will service your equipment promptly and maintain your investment.



Need to add equipment to fulfill a new stimulus contract? Feel saddled with old, inefficient construction and mining equipment? Now Rhino Equipment® can help, with our new full machinery line 0% / low monthly finance program. It's a great way for constructors, contractors and engineers to finance and acquire productive and reliable new machinery with a single phone call.



Our genuine Rhino® parts are designed to work in perfect harmony with your machine for optimum performance and productivity.

Rhino® uses superior materials and exacting manufacturing processes to keep our customers up and running.



Wheel Loaders



Specifications	RWL65	RWL102	RWL132	RWL163	RWL186
Engine	4BT3.3-C	6BT5.9-C	6BTA5.9 or QSB5.9	6CTA8.3-C215	6CTAA8.3-C
Rated Output kW (hp)@rpm	74(100)2,200	87(117)2,200	97(130) / 126(169)2,200	160(215)2,200	179(240)2,200
Operational Weight Kg (lb)	6,550(14,440)	10,200(22,487)	13,200(29,101)	16,300(35,935)	18,600(41,006)
Rated Load Kg (lb)	1,880(3,968)	3,000(6,614)	4,000(8,818)	5,000(11,023)	6,000(13,228)
Bucket Capacity m3 (cu.Yd)	1.0(1.3)	1.4(1.8)	2.0(2.6)	2.5(3.3)	3.0(3.9)
Breakout Force kN (lbf)	57(12,566)	96(21,164)	134(29,542)	150(33,069)	186(41,006)




Specifications	RWL235	RWL315
Engine	6CTA8.3 / 6LTAA8.9	QMS11
Rated Output kW (hp)@rpm	216(290)2,200	250(335)2,100
Operational Weight Kg (lb)	23,500(51,809)	31,500(69,446)
Rated Load Kg (lb)	7,500(16,535)	9,000(19,842)
Bucket Capacity m3 (cu.Yd)	3.5 (4.6)	4.4 (5.8)
Breakout Force kN (lbf)	220(48,502)	264(58,202)



Options



Waste Handling



General Purpose



Pallet Forks

Buckets can be custom made depending on client requirements such as a bigger bucket for lighter material handling or clam buckets or among many other options.

Other Options: Tier 2, Tier 3, Tier 4 Engine, Pallet forks, Grapples, ROPS, FOPS cab, A/C, Solid Tires, Hydraulic Line, and more...



Specifications	RM80	RM120	RM123	RM138
Engine	RM80-4J12T or Cummins 4BT	RM80-4J12T or Cummins 4BT	RD140-8A or Cummins 6CTAA	6CTA8.3
Rated Output kW (hp)@rpm	60(80)2,800	85(114)2,400	132(177)2,200	142(190)2,200
Operational Weight Kg (lb)	6,000(13,228)	6,110(13,470)	14,500(31,967)	15,200(33,510)
Length mm (ft)	6,800(22.3)	6,900(22.6)	8,615(28.3)	9,140(30)
Blade Length mm (ft)	2,200(7.2)	2,200(7.2)	3,660(12)	4,270(14)



Specifications	RM165	RM166
Engine	QSB6	RHCB220
Rated Output kW (hp)@rpm	164(220)2,200	164(220)2,200
Operational Weight Kg (lb)	16,400(36,156)	16,600(36,597)
Length mm (ft)	9,140(29.5)	8,990(29.5)
Blade Length mm (ft)	4,320(14.2)	4,320(14.2)



Options




Dozer Blade



Rear Ripper



Front V Blade



Mid Body Scarifier

Rhino Motor Graders come standard with rear ripper. They can come with front scarifier, front dozer blade, mid-body scarifier, and rear scarifier. As well as many other options depending on client requirements.

Other Options: Tier 2, Tier 3, Tier 4 Engine, Front V Scarifier, Front V dozer Blade, Rear Ripper 5 Shank, Rear Ripper 3 Shank, All Wheel Drive, A/C, ROPS/FOPS, and more...

Motor Graders



								
Specifications	REX10	REX18	REX22	REX30	REX35	REX50	REX70.8	REX130
Engine	3TNV82	3TNV82A	3TNV82	4TNV88	4TNV88	4TNV94	4TNV98T	4BTAA3.9/QSF3.8
Rated Output kW (hp)@rpm	13.6(18)2,200	18.4(25)2,350	20(26.8)2,200	24(32.2)2,200	25(34)2,200	36.9(50)2,200	54.3(73)2,200	86(115)2,200
Operational Weight Kg (lb)	800(1,764)	1,760(3,880)	2,200(4,850)	3,000(6,613)	4,200(9,259)	5,710(12,588)	8,000(17,637)	13,000(28,660)
Max. Digging Depth mm (ft)	1,880(5.9)	1,980(6.5)	2,630(8.6)	2,990(9.8)	3,076(10.1)	3,935(12.9)	4,038(13.2)	5,500(18)
Bucket Capacity m3 (cu.Yd)	0.04 (0.05)	0.04 (0.05)	0.09 (0.1)	0.17 (0.2)	0.17 (0.2)	0.28 (0.4)	0.34 (0.44)	0.53 (0.7)

							
Specifications	REX150	REX210	REX330	REX360	REX450	REX700	REX800
Engine	V3800	V50009/QSB6.7/6BTAA5.9	6BTAA5.9/6BG1TRP	6CTAA8.3-C	QSM11	QSX15	QSM15 77C/6WG1
Rated Output kW (hp)@rpm	95(127)2,200	133(178)1,950	241(323)2,200	192(257)2,200	251(337)2,200	264(354)1,800	563(755)/ 377(506)
Operational Weight Kg (lb)	15,000(33,069)	21,354(47,078)	33,000(72,753)	34,500(76,059)	45,800(100,972)	70,000(154,324)	76,500(168,653)
Max. Digging Depth mm (ft)	6,200(20.4)	6,515(21.4)	7,370(24.2)	7,370(24.2)	7,810(25.6)	7,185(23.6)	7,050(23.1)
Bucket Capacity m3 (cu.Yd)	0.6 (0.8)	1 (1.3)	1.45 (1.9)	1.6 (2.1)	2.1 (2.7)	4 (5.2)	5(6.6)



Options

Rhino excavators come standard with the hydraulic line for attachments. Attachments include hydraulic hammers, thumb cutters, and many more.


Other Options: Tier 2, Tier 3, Tier 4 Engine, Rakes, Compactors, Cutters, Augers, Grapples, Longer Arm Length, Grinders, Rock Buckets and more...

					
Specifications	RD8	RD13	RD15	RD17	RD24
Engine	4BTA3.9	6BT5.9	RD140-8A	RH52E871	NT855/NTA855
Rated output kW (hp)@rpm	70(94)2,300	93(125)2,600	105(140)1,500	131(176)1,850	175(235) / 209(280)1,800
Operational weight Kg(lb)	8,480(18,695)	13,000(28,660)	15,800(34,833)	16,500(36,376)	23,450(51,698) / 30,700(67,681)
Blade width mm (ft)	2,480(8.1)	3,135 (10.3)	3,200(10.5)	3,416(11.2)	3,823(12.5)

			
Specifications	RD36	RD50	RD55
Engine	NTA855	KTA19-C525	QSK19
Rated output kW (hp)@rpm	257(345)2,000	308(413)2,000	388(520)1,800
Operational weight Kg(lb)	35,900(79,146)	49,500(109,129)	61,500(135,584)
Blade width mm (ft)	4,130(13.5)	4,314(14.2)	4,695(15.4)



Options

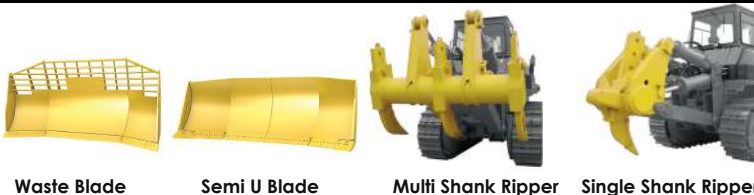

Blades can be custom made depending on client requirements such as a bigger blade for lighter material handling or among many other options.

Other Options: Tier 2, Tier 3, Tier 4 Engine, Triple Grouser Shoes, Swamp Shoes, Angle Blade, Straight Blade, Pat Blade, 6 - Way Blade, U-Blade, Semi-U Blade, Waste Blade, and more...



Specifications	REX60W	REX74CW	REX75W	REX210W
Engine	Rhino A498BPG	Rhino A498BPG	Cummins QSF2.8	Cummins 6BT5.9
Rated Output kW (hp)@rpm	45(60)2,500	45(60)2,500	53(71)2,200	112(150)2,200
Operational Weight Kg (lb)	5,980(13,184)	7,400(16,314)	7,090(15,630)	20,600(45,415)
Max. Digging Depth mm (ft)	2,857(9.4)	2,990(9.8)	3,930(12.8)	6,330(20.8)
Bucket Capacity m3 (cu.Yd)	0.2(0.3)	0.2(0.3)	0.2(0.3)	1(1.3))

Options



Hydraulic Hammers



General Purpose Buckets



Shears



Dozer Blades

Rhino excavators can come with hydraulic line for attachments. Attachments include hydraulic hammers, thumb cutters, and many more.

Other Options: Tier 2, Tier 3, Tier 4 Engine, Rakes, Compactors, Cutters, Augers, Grapples, Longer Arm Length, Grinders, Rock Buckets and more...



Loader



Specifications	RBH70
Engine	4BTA3.9
Rated Output kW (hp)@rpm	82(110) / 60(80)2,200
Operational Weight Kg (lb)	7,600(16,755)
Rated Load kg (lb)	2,750(6,063)
Max. Load Breakout Force kN (lb)	44(9,892)

Backhoe

Rated Digging Capacity m3 (cu.Yd)	0.3(0.4)
Max. Digging Depth mm (ft)	4,340(14.2)/6,000(19.7)
Max. Digging Force kN (ft)	55(12,364)
Max. Dumping Height mm (ft)	3,640(11.9)/4,930(16.2)
Bucket Size Range mm (in)	305-813(12-32)



Options



Hydraulic Hammers



General Purpose Buckets



4 in 1 Buckets

Rhino backhoes can come with the hydraulic line for attachments. Attachments include hydraulic hammers, thumb cutters, and many more.

Other Options: Tier 2, Tier 3, Tier 4 Engine, Heavy Duty Bucket, Trench Hoe Bucket, Bucket Quick Couplers, Grapples, Pallet Forks, Augers, A/C, ROPS/FOPS, and more...



Wheel Dozers



Specifications	RWD132	RWD235	RWD315
Engine	6BTA5.9	6CTA8.3/6LTAA8.9	QSM11
Rated Output kW (hp) @ rpm	132(180)2,200	179/(240)/178(238)2,200/220(295)2,100	220(300)2,100
Operational Weight Kg (lb)	13,000(28,660)	21,000(46,3)/22,200(48,9)/23,000(50,7)	26,500 (58,422)
Blade Width mm (ft)	3,300(10.8)	3,600(23)	4,500(14.7)
Blade Capacity m3 (cu. Yd)	3.0(3.9)	4.5(5.9)	5.3(6.9)

Options



Waste Blade



Semi U Blade



Multi Shank Ripper

Blades can be custom made depending on client requirements such as a bigger blade for snow, lighter material handling or among many other options.

Other Options: Tier 2, Tier 3, Tier 4 Engine, Angle Blade, Straight Blade, U-Blade, Semi-U Blade, Waste Blade, and more...



Specifications	RTL17	RTL24	RTL36
Engine	Rhino C6	Cummins NT855	Cummins NTA855
Rated Output kW (hp) @ rpm	131(176)1,850	164(220)2,000	257(345)2,000
Operational Weight Kg (lb)	20,068(44,242)	23,340(51,456)	35,750(78,815)
Bucket Capacity m3 (cu. Yd)	1.7(2.2)	2.3(3.0)	3.7(4.8)

Options



Waste Handling



General Purpose



Multi Shank Ripper

Buckets can be custom made depending on client requirements such as a bigger bucket for lighter material handling or clam buckets or among many other options.

Other Options: Tier 2, Tier 3, Tier 4 Engine, Pallet forks, Grapples, ROPS, FOPS cab, Triple Grouser Shoes, Swamp Shoes, Hydraulic Line, and more...



Specifications	RPL25	RPL45	RPL70
Engine	Rhino WD	Cummins NT855	Cummins NTA855
Rated Output kW (hp) @ rpm	120(161)1,850	169(227)2,000	235(315)2,000
Operational Weight Kg (lb)	22,000(48,502)	34,000(74,957)	47,500(104,720)
Lifting Capacity kg (lb)	25,000(55,116)	45,000(99,208)	70,000(154,324)

Options



Tier 2, Tier 3, Tier 4 Engine, Triple Grouser Shoes, Swamp Shoes, 610mm Shoes, 1,100 mm Shoes, A/C, ROPS/FOPS, Central Lubrication, and more...

Track Loaders

Pipelayers



Specifications	RS50-S	RS60-S	RS70-S
Engine	Rhino A498BPG	Rhino RHA4C6-88C33/Kohler KDI2504TCR	Rhino RH4J1/ Perkins 1104C-44T
Rated Output kW (hp)@rpm	45(60)2,500	65(84)2,200/55.4(74.3)2,600	85(113)2,200/74.5(99.9)2,300
Operational Weight Kg (lb)	3,100(6,834)	3,520(7,760)	4,260(9,391)
Rated Load Kg (lb)	1,060(2,337)	1,100(2,425)	1,400(3,086)
Bucket Capacity m3 (cu.Yd)	0.47(0.6)	0.55(0.7)	0.55(0.7)
Tires	10-16.5	12-16.5	12.16.5

Options



Tier 2, Tier 3, Tier 4 Engine, FOPS/ROPS Cab, Central Lubrication System, High Flow Pump, Augers, Backhoe, Bale Movers, Dozer Blade, Snow Blade, Boom Lifts, Hydraulic Hammers, Brooms, Waste Bucket, 4 in 1 Bucket, High Dump Bucket, Skeleton Rock Bucket, Utility Fork Bucket, Chipper, Cold Planers, Cement Mixer, Grader Blade, Grapples, Hitch Adapter, Mowers, Pallet Forks, Rakes, Rock Wheel, Roto Tiller, Scarifier, Scrapers, Snow Blower, Spreaders, Solid Tires, Grouser Tracks, Trench Filler, and more...



Off-Highway Trucks



Specifications	RT50	RT70	RT100
Engine	QXS15	QSK23	QST30
Rated Output kW (hp)@rpm	392 (526) 2,100	567 (760) 2,100	783 (1,050) 2,100
Operational Weight Kg (lb)	35,890 (79,124)	46,000 (101,413)	69,000 (152,119)
Body Capacity m3 (cu. Yd)	28.0 (36.6)	41.0 (53.6)	58.0(75.9)
Payload kg (lb)	45,000 (99,208)	65,000 (143,300)	91,000 (200,621)



Articulated Trucks



Specifications	RADT30	RADT40	RADT60
Engine	M11	M11	QSK19
Rated Output kW (hp)@rpm	330(442) 2,200	350(469) 2,400	522 (700) 2,000
Operational Weight Kg (lb)	53,000 (116,845)	73,000 (160,937)	108,000 (238,099)
Carriage Capacity m3 (cu. Yd)	13.9 (18.1)	18.5 (24.1)	31.0 (40.5)
Payload kg (lb)	30,000(66,138)	39,000(85,980)	60,000(132,277)



Mining Trucks



Specifications	RMT50	RMT55	RMT60	RMT80
Engine	Rhino WD50	Rhino WD55	Rhino WD60	Rhino T12
Rated Output kW (hp)@rpm	247(331) 2,200	279(374) 2,400	309 (414) 2,100	279 (374) 2,000
Operational Weight Kg (lb)	22,000 (48,502)	22,000 (48,502)	25,000 (55,116)	26,000 (57,320)
Body Capacity m3 (cu. Yd)	25.4 (33.2)	25.4 (33.2)	27.2 (35.6)	36.4 (47.6)
Payload kg (lb)	50,000(110,231)	55,000(121,254)	60,000(132,277)	80,000(176,370)



Options



Tier 2, Tier 3, Tier 4 Engine, Engine Brake, Central Lubrication, External Cameras, 16.00 R25 Tires, A/C, and more...



Cold Planers

Asphalt Pavers



Specifications	RCP500W	RCP1000W	RCP1300W	RCP2100T
Engine	Deutz F4	Rhino SC8D190G2B1	Rhino SC8D190G2B1	Cummins QSX15
Rated Output kW (hp)@rpm	46(62)2,200	140(188)2,200	140(188)2,200	447(599)2,100
Operational Weight Kg (lb)	4,800(10,582)	15,500(34,172)	15,800(34,833)	32,500(71,650)
Milling Width mm (in)	500(19.7)	1,000(39.4)	1,300(51.2)	2,100(82.7)
Milling Depth mm (in)	60(2.4)	150(5.9)	120(4.7)	320(12.6)

Options



Power Milling Drum



Fine Milling Drum

Tier 2, Tier 3, Tier 4 Engine, Power Milling Drum, Fine Milling Drum, Smaller Milling Drum, Auto Leveling, Central Lubrication, 4WD, and more...



Specifications	RAP45T	RAP70T	RAP75T	RAP45W	RAP60W
Engine	Rhino 4J	Deutz BF	Rhino SC	Rhino 4J	Cummins QSB3.9 / QSB5.9
Rated output kW (hp)@rpm	55(74) 2,000	112(150) 2,300	174(233) 2,300	55(74) 2,000	75(100) 2,200
Operational weight kg (lb)	11,000 (24,251)	19,500 (42,990)	25,000 (55,116)	11,000 (24,251)	14,500 (31,967)
Min. Paving Width mm (ft)	2,500(8.2)	3,000(9.8)	3,000(9.8)	2,500(8.2)	2,800(9.2)
Max. Paving Width mm (ft)	4,500(14.8)	7,000(23.0)	7,500(24.6)	4,500(14.8)	6,000(19.7)

Options



Rubber Tracks



Steel Tracks



Extension Screeds

Tier 2, Tier 3, Tier 4 Engine, Infrared Heating Screed, Full Hydraulic Extension Screed, Auto-Leveling, Steel Tracks, and more...







Tandem Rollers



Specifications	RCT10H	RCT15H	RCT30H
Engine	XR420CC	627CC	Rhino CZ380Q
Rated Output kW (hp)	13,5 (18)	17 (23)	26,5 (35.5)
Operational Weight Kg (lb)	1,000 (2,204)	1,500 (3,306)	3,000 (6,614)
Drum Width mm (ft)	800 (2.6)	900 (2.9)	1,250 (4.1)
Exiting Force kN (lb)	25 (5,620)	30 (6,744)	60 (13,489)
Vibration Frequency Hz (vpm)	70 (4,200)	65 (3,900)	50 (3,000)



Specifications	RCT40H	RCT60H	RCT80H
Engine	Rhino ZN390Q	Rhino ZN390Q	4BTA3.9
Rated Output kW (hp)	33,6 (45.7)	34 (45)	93 (125)
Operational Weight Kg (lb)	4,000 (8,819)	6,000 (13,228)	8,000 (17,637)/8,900 (19,622)
Drum Width mm (ft)	1,400 (4.5)	1,350 (4.4)	1,870 (6.1)
Exiting Force kN (lb)	39 (8,768)	60 (13,489)	180 (40,466)
Vibration Frequency Hz (vpm)	50 (3,000)	50 (3,000)	50 (3,000)



Specifications	RCT100H	RCT120H	RCT14H3
Engine	4BTA3.9	4BTA3.9	6BTAA
Rated Output kW (hp)	93 (125)	93 (125)	110 (148)
Operational Weight Kg (lb)	10,000 (22,046)	12,000 (26,455)	14,000 (30,865)
Drum Width mm (ft)	2,130 (7.0)	2,130 (7.0)	2,130 (7.0)
Exiting Force kN (lb)	230 (51,706)	230 (51,706)	350 (78,683)
Vibration Frequency Hz (vpm)	50 (3,000)	50 (3,000)	55 (3,300)

Options



Pressurized Water Spray



Edge Cutter

ROPS/FOPS Cab, Tier 2, Tier 3, Tier 4 Engine, Pressurized Water Spray, Anti-Freeze Kit for Water Tanks, and more...



Specifications	RPR109	RPR1611	RPR2011
Engine	4BT3.9/6BT5.9	4BT5.9	6BTA5.9
Rated Output kW (hp)@rpm	73.5(98.5)2,400	110(148)2,400	125(170)2,400
Min. Operational Weight Kg (lb)	10,000(22,046)	16,000(35,274)	20,000(44,092)
Max. Operational Weight Kg (lb)	16,000(35,274)	26,000(57,320)	30,000(66,139)
Ballast Volume m3 (cu. Ft)	3.9(138)	3.2(113)	3.2(113)

Options



Pressurized Water Spray

ROPS/FOPS Cab, Tier 2, Tier 3, Tier 4 Engine, Pressurized Water Spray, Anti-Freeze Kit for Water Tanks, and more...



Pneumatic Rollers



Specifications	RSC220	RSC223	RSC226	RSC228	RSC230	RSC233
Engine	RSC8DK20	RSC8DK23	RSC9DK26	RSC9DK26	RSC9DK30	QSM11
Rated Output kW (hp)@rpm	147(197)2,200	147(197)2,200	192(257)2,200	192(257)2,200	250(335)2,200	250(335)2,200
Operational Weight Kg (lb)	20,000(44,092)	23,000(50,706)	26,000(57,320)	28,000(61,729)	30,000(66,139)	33,000(72,753)
Drum Diameter mm (ft)	1,500(4.9)	1,500(4.9)	1,620(5.3)	1,620(5.3)	1,620(5.3)	1,620(5.3)

Options



Waste Blade



Semi U Blade



Refuse Compaction Wheels

ROPS/FOPS Cab, Tier 2, Tier 3, Tier 4 Engine, Infrared Outside Camera, Tilt Cylinder for Blade, A/C, U-Blade, Semi-U Blade, Soil Compaction Drums, Refuse Compaction Wheels, Soil Compaction Wheels, Woodchip Blade, Coal U Blades and more...



Soil Compactors




Specifications	RC30	RC70	RC80	RC100	RC120
Engine	Rhino ZN	Rhino A4	4BT or Rhino A4	4BT/6BT or Rhino A4	4BT/6BT or Rhino A4
Rated output kW (hp)@rpm	22 (30)2,600	42(56)2,500	42/80 (56/107)2,300	77/110 (103/148)2,300	77/110 (103/148)2,300
Operational weight kg (lb)	3,000 (6,614)	7,000 (15,432)	8,000 (17,637)	10,200 (22,487)	12,000 (26,455)
Drum width mm (ft)	1,200 (3.9)	1,700 (5.6)	1,700 (5.6)	2,100 (6.9)	2,100 (6.9)
Static line force N/cm (lb/in)	114 (65)	215 (123)	226 (129)	242 (138)	303 (173)
Static drum weight Kg (lb)	1,510 (3,329)	4,900 (10,803)	3,900 (8,598)	4,850 (10,692)	6,500 (14,330)



Specifications	RC140	RC160	RC180	RC200
Engine	6BT5	6BT5	6BT5	6BT5
Rated output kW (hp)@rpm	110 (148)2,300	110(148)2,300	132 (177)2,300	132 (177)2,300
Operational weight kg (lb)	14,000 (30,865)	16,000 (35,274)	18,000 (39,683)	20,000 (44,092)
Drum width mm (ft)	2,100 (6.9)	2,100 (6.9)	2,100 (6.9)	2,100 (6.9)
Static line force N/cm (lb/in)	373 (213)	457 (261)	470 (268)	500 (286)
Static drum weight Kg (lb)	8,500 (18,739)	8,500 (18,739)	9,500 (20,944)	10,500 (23,149)



Options

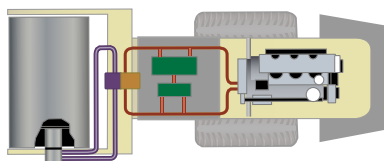

Drum Drive System



Pad Foot System

Rhino Engine, Tier 2, Tier 3, Tier 4 Engine, ROPS/FOPS Cab, A/C, Pressurized Water Spray System, Drum Drive System, Pad Foot, Dozer Blade, Water Tank System, Asphalt Wheels, Central Lubrication, and more...

Vibratory Compactors



Specifications	RFL200DT	RFL250DT	RFL300DT	RFL400DT	RFL500DT	RFL700DT	RFL1000DT
Rated Capacity kg(lb)	2,000 (4,409)	2,500 (5,512)	3,000 (6,614)	4,000 (8,818)	5,000 (11,023)	7,000 (15,432)	10,000 (22,046)
Power Type	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Power kW(hp)	39 (52.3)	39 (52.3)	42 (56.3)	45 (60.3)	59 (79.1)	81 (108.6)	81 (108.6)
Lifting Height mm (in)	3,000 (118.1)	3,000 (118.1)	3,000 (118.1)	3,000 (118.1)	3,000 (118.1)	3,000 (118.1)	3,000 (118.1)
Turning Radius mm(in)	2,450 (96.5)	2,500 (98.4)	2,500 (98.4)	2,720 (107.1)	3,000 (118.1)	3,450 (135.8)	3,900 (153.5)



Specifications	RFL1200DT	RFL1500DT	RFL1600DT	RFL2000DT	RFL2500DT	RFL3000DT
Rated Capacity kg(lb)	12,000 (26,455)	15,000 (33,069)	16,000 (35,274)	20,000 (44,092)	25,000 (55,116)	30,000 (66,139)
Power Type	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Power kW(hp)	97 (130)	142 (190)	142 (190)	160 (215)	179 (240)	191 (256)
Lifting Height mm (in)	3,000 (118.1)	3,500 (137.8)	3,500 (137.8)	3,500 (137.8)	3,500 (137.8)	3,500 (137.8)
Turning Radius mm(in)	4,200 (165.4)	5,800 (228.3)	5,800 (228.3)	6,250 (246.1)	6,700 (263.8)	7,260 (285.8)



Specifications	RFL3500DT	RFL4500DT
Rated Capacity kg(lb)	35,000 (77,162)	45,000 (99,208)
Power Type	Diesel	Diesel
Power kW(hp)	191 (256)	250 (335)
Lifting Height mm (in)	3,500 (137.8)	4,000 (157.5)
Turning Radius mm(in)	7,260 (285.8)	8,600 (338.6)



Specifications	RFL200LPG	RFL300LPG	RFL350LPG
Rated Capacity kg(lb)	2,000 (4,409)	3,000 (6,614)	3,500 (7,716)
Power Type	Gasoline/LPG	Gasoline/LPG	Gasoline/LPG
Power kW(hp)	41 (55.0)	41 (55.0)	41 (55.0)
Lifting Height mm (in)	3,000 (118.1)	3,000 (118.1)	3,000 (118.1)
Turning Radius mm(in)	2,400 (94.5)	2,550 (100.4)	2,575 (101.4)



Specifications	RFL200E	RFL300E	RFL350E
Rated Capacity kg(lb)	2,000 (4,409)	3,000 (6,614)	3,500 (7,716)
Power Type	Battery / Electric	Battery / Electric	Battery / Electric
Load center mm (in)	500 (19.7)	500 (19.7)	500 (19.7)
Lifting Height mm (in)	3,000 (118.1)	3,000 (118.1)	3,000 (118.1)
Turning Radius mm(in)	2,200 (86.6)	2,350 (92.5)	2,400 (94.5)



Specifications	RRS4500
Rated Capacity kg(lb)	45,000 (99,208)
Power Type	Diesel
Lifting Speed (unload/loading) mm/s (in/s)	104/60 (4/2)
Lifting Height mm (in)	15,100 (594)
Turning Radius mm(in)	8,200 (323)



Options

Options: Tier 2, Tier 3, Tier 4 Engine, Different wheel/tire types, power-line, side shifter, torque converter, temperature warning, A wide range of different platforms, front and fork attachments are available. And more...

Forklifts

Reach Stacker



Light Towers

Attachments



Specifications	RLT4000M	RLT4000H	RLT4X150 Solar
Number & Power of Lights	4x1000W	4x1000W	4x150W
Mast Height(Fully Extended) m (ft)	7.5(24.6)	9(29.5)	9(29.5)
Mast Lifting & Extension	Manual Operation	Hydraulic	Hydraulic
Fuel Tank Capacity L (gal)	100(26.4)	75(19.8)	N/A
Net Weight kg (lb)	740(1,631)	1,148(2,531)	1,950(4,299)



Options



Standard Bulb



LED Lamp

Rhino Equipment offers the perfect lighting solutions to tackle your applications. Trusted power generator packages, exceptional lamp performance, and flexible modular designs allow you to choose the model that best supports: construction sites, outdoor events, and industrial settings Available with tier 2, tier 3, tier 4 engine and more...



Palet forks



Rock wheels



Buckets



Brooms



Augers



Skid hoe



Grapples



Trench fillers

... and much more
Contact a dealer near you



Specifications	RTC-2325	RTC-4708	RTC-4807
Reach m (ft)	25 (82)	47 (154)	48 (157)
Capacity tons@mts (lb@ft)	0.8@25-2@11.7 (1,764@82-4,000@38.4)	0.8@47 - 4@12.3 (1,764@154-8,000@40.4)	0.71@48 - 4@10.7 (1,565@157.5-8,000@35.1)
Max. capacity tons (lb)	2 (4,000)	4 (8,000)	4 (8,000)
Standard height mts (ft)	23 (75.5)	28.3 (92.8)	29.7 (97.4)
Max. height m (ft)	35 (114.8)	120 (393.7)	120 (393.7)

Specifications	RTC5013	RTC-5512	RTC-6014
Reach mts (ft)	50 (164)	55 (180)	60 (196.9)
Capacity tons@mts (lb@ft)	1.3@50 - 6@13.7 (2,866@164-12,000@45)	1.2@55 - 8@11.2 (2,646@180.4-16,000@37)	1.4@60 - 8@15 (3,087@197-16,000@49)
Max. capacity tons (lb)	6 (12,000)	8 (16,000)	8 (16,000)
Standard height mts (ft)	40 (131.2)	46 (150.9)	46 (151.6)
Max. height mts (ft)	140 (459.3)	150 (492.1)	161 (528.2)

Specifications	RTC-6014B	RTC-6516	RTCE-5012T
Reach mts (ft)	60 (197)	65 (213)	N/A
Capacity tons@mts (lb@ft)	1.4@60 - 10@11.7 (3,087@197-20,000@38)	1.6@65 - 10@15 (3,527@213-20,000@49)	2 (4,000)
Max. capacity tons (lb)	10 (20,000)	10 (20,000)	2 (4,000)
Standard height mts (ft)	46.2 (151.6)	46.2 (151.6)	50 (164.0)
Max. height mts (ft)	200 (656.2)	200 (656.2)	300 (984.3)

Options




Concrete Buckets, Pallet forks, Height Modules, Platforms, Grippers, Dumping bins, A/C, and more...

Specifications	254SK	47SK-47BE	714BE	1826EX
Equipment class tons (lb)	2.5-4.5 (5,512-9,921)	4.0-7.0 (8,819-15,432)	7.0-14 (15,432-30,865)	18-26 (39,683-57,320)
Operational weight Kg (lb)	150 (331)	275 (606)	500 (1,102)	1,740 (3,836)
Height mm (ft)	1,342 (4.4)	1,600 (5.2)	2,101 (6.9)	2,327 (7.6)
Operating pressure bar (psi)	90-120 (1,305-1,740)	95-130 (1,378-1,885)	130-150 (1,885-2,176)	160-180 (2,321-2,611)
Impact range bpm	600-1,100	500-900	400-800	400-500
Hose diameter mm (in)	12.7 (0.5)	12.7 (0.5)	19.05 (0.75)	25.4 (1.0)

Specifications	2735EX	3255EX
Equipment class tons (lb)	27-35 (59,525-77,162)	32-55 (70,547-121,254)
Operational weight Kg (lb)	2,420 (5,335)	3,020 (6,658)
Height mm (ft)	2,500 (8.2)	2,740 (9.0)
Operating pressure bar (psi)	160-180 (2,321-2,611)	160-180 (2,321-2,611)
Impact range bpm	300-450	250-400
Hose diameter mm (in)	25.4 (1.0)	31.7 (1.25)



Options



Tools



Underwater Kit

Moil Tool, Chisel Tool, Blunt Tool, Asphalt Chisel, Wide Chisel, Underwater Kit, and more...



50Hz 		60Hz 		50Hz 		60Hz 	
Model	Max. Power (kw)	Model	Max. Power (kw)	Model	Max. Power (kw)	Model	Max. Power (kw)
RG25-1	26	RG25-2	30	RG9-1	9.3	RG10-2	11.4
RG40-1	40	RG38-2	45	RG13-1	13.3	RG14-2	15.9
RG60-1	55	RG60-2	65	RG20-1	20.3	RG20-2	23.9
RG100-1	100	RG100-2	115	RG27-1	27	RG28-2	32.6
RG115-1	110	RG120-2	132	RG30-1	30.4	RG30-2	35.4
RG140-1	132	RG125-2	140	RG45-1	45.6	RG50-2	53.9
RG180-1	180	RG175-2	207	RG60-1	59.3	RG60-2	67.5
RG220-1	207	RG200-2	230	RG65-1	64.3	RG65-2	75.5
RG250-1	243	RG250-2	265	RG80-1	79.1	RG80-2	90.2
RG260-1	254	RG280-2	317	RG100-1	99.5	RG100-2	111
RG265-1	257	RG320-2	347	RG136-1	133.5	RG135-2	147
RG300-1	291	RG350-2	399	RG150-1	143	RG140-2	155.3
RG312-1	321	RG385-2	448	RG185-1	175.5	RG150-2	163.4
RG320-1	310	RG460-2	511	RG200-1	199	RG180-2	196.3
RG350-1	343	RG515-2	563	RG230-1	217	RG200-2	220
RG365-1	351	RG550-2	605	RG250-1	239	RG215-2	235
RG375-1	407	RG600-2	658	RG350-1	349	RG350-2	381
RG400-1	369	RG700-2	747	RG400-1	392	RG400-2	435
RG450-1	448	RG825-2	895	RG450-1	435	RG450-2	490
RG500-1	504	RG935-2	1007	RG500-1	478	RG500-2	543
RG580-1	575	RG1035-2	1112	RG600-1	574	RG550-2	598
RG585-1	555	RG1140-2	1220	RG650-1	609	RG600-2	652
RG625-1	610	RG1265-2	1380	RG730-1	685	RG675-2	715
RG780-1	731	RG2000-2	2500	RG800-1	760	RG750-2	795
RG800-1	789	Single Phase		RG850-1	787	RG780-2	821
RG900-1	895	RG25-2SC	30	RG905-1	839	RG880-2	924
RG1000-1	970	RG38-2SC	45	RG1022-1	947	RG1100-2	1166
RG1125-1	1089	RG55-2SC	65	RG1253-1	1166	RG1200-2	1263
RG1250-1	1227	Rhino Engine		RG1364-1	1263	RG1325-2	1395
RG1400-1	1429	RG16-R	20	RG1505-1	1395	RG1500-2	1875
RG1900-1	1790	RG20-R	25	RG1705-1	1579		
RG2000-1	1915			RG1752-1	1607		
				RG1844-1	1690		
				RG2058-1	1886		



Composed of Cummins, Perkins or Rhino diesel engine, Tier 2, Tier 3, Tier 4 Engine, Stamford, Marathon or Rhino alternator, Key start panel control system as standard, digital auto-start panel, 8-hour operation base tank, Open type or silent type and more...



Face Drills



Specifications	RFD1X-2045	RFD1X-2050	RFD1X-2060	RFD1X-2565	RFD1X-3570	RFD1X-3068	RFD1X-4010
Engine	RFD50T/4TNV94L	RFD65T/B3.3T	RFD67T/B3.3T	RFD67T/B3.3T	RFD97T/QSB4.5	RFD56T/4TNV98T	RFD97T/BF4M
Electric Engine kW (hp)	55 (74)	55 (74)	55 (74)	55 (74)	2x55 (74)	55 (74)	75 (101)
Drilling Power kW (hp)	18 (24)	18 (24)	24 (32)	24 (32)	25 (33)	18 (24)	18 (24)
Diesel Engine kW (hp)	49 (66)	65 (87)	67 (90)	67 (90)	97 (130)	56 (75)	97 (130)
Min. Coverage Area m	2.0 x 2.0	2.3 x 2.3	5.3 x 5.7	2.5 x 2.5	3.0 x 3.0	3.0 x 3.0	4.5 x 4.5
Max. Coverage Area m	5.0 x 4.5	5.5 x 4.5	6.5 x 6.1	6.5 x 6.0	7.0 x 6.5	6.8 x 6.7	10.0 x 13.0



Specifications	RFD1X-4511	RFD2X-4070	RFD2X-4590	RFD2X-5012	RFD3X-6017	RFD2XD-5015
Engine	RFD119T/BF4M1013FC	RFD97T/WP4G120E310	RFD164T/QSB5.9	RFD208T/QSB6.7	RFD209T/6CTA8.3	RFD119T/BF4M
Electric Engine kW (hp)	95 (127)	2x55 (74)	110 (148)	150 (201)	3x55 (74)	2x55 (74)
Drilling Power kW (hp)	22 (30)	18 (24)	18 (24)	22 (30)	18 (24)	22 (30)
Diesel Engine kW (hp)	119 (160)	97 (130)	164 (220)	208 (280)	209 (280)	119 (160)
Min. Coverage Area m	4.5 x 4.5	4.0 x 4.0	4.5 x 4.5	5.0 x 5.0	6.9 x 5.5	5.0 x 5.0
Max. Coverage Area m	11.9 x 16.0	7.0 x 6.7	13.8 x 9.7	12.0 x 8.6	17.5 x 13.0	15.9 x 12.0



Specifications	RWD132M	RWD235M	RWD315M
Engine	6BTA5.9	6LTA8.9-C295	M11-C
Engine Power kW (hp)	132 (177)	220 (295)	250 (335)
Operating Weight kg (lb)	13,000 (28,660)	21,000 (46,297)	34,500 (76,059)
Blade Capacity m3 (cu. yd)	3.0 (3.9)	4.5 (5.9)	5.3 (6.9)
Overall Height mm (ft)	2,800 (9.19)	2,800 (9.19)	2,800 (9.19)



Specifications	RMWL-308E	RMWL-103	RMWL-305	RMWL-400	RMWL-500	RMWL-600
Engine	RMWL700E	RMWL92.5T/TAD850VE	RMWL179T/TAD850VE	RHINO	RMWL262T/TAD853	RMWL 290T/TAD1350VE
Engine Power kW (hp)	340 (456)	93 (125)	179 (240)	235 (315)	252 (338)	290 (389)
Payload Capacity kg (lb)	7,000 (15,432)	2,000 (4,409)	7,000 (15,432)	9,500 (20,943)	10,000 (22,046)	15,000 (33,069)
Bucket Capacity m3 (cu. yd)	3.5 (4.6)	1.0 (1.3)	3.5 (4.6)	4.0 (5.2)	5.0 (6.5)	6.0 (7.8)
Operating Weight kg (lb)	22,000 (48,502)	7,200 (15,873)	19,250 (42,439)	28,500 (62,832)	28,500 (62,832)	38,000 (83,776)
Breakout Force kN	175.9	117.9	175.9	188.3	188.3	228.4



Specifications	RMU-T20	RMU-T30	RMU-T45
Engine	RMUT256T/TAD853VE	RMUT329T/TAD1352VE	RTM630A/TAD1651VE
Engine Power kW (hp)	256 (343)	329 (441)	469 (629)
Operating Weight kg (lb)	22,600 (49,824)	31,000 (68,343)	40,100 (88,405)
Payload Capacity kg (lb)	20,000 (44,093)	30,000 (66,139)	45,000 (99,208)
Hopper Capacity m3 (cu. yd)	10.0 (13.1)	15.0 (19.6)	21.5 (28.1)

Underground Wheel Dozers

Underground Wheel Loaders

Trucks



Rock Bolting Rigs



Specifications	RBR-125	RBR-135	RBR-168	RBR-154	RBR-156	RBR-210
Engine	RBR64T/4BTA 3.9	RBR60T/QSF2.8	RBR134T/QSB4.5	RBR67T/QSF3.8	RBR71T/QSF3.8	RBR100T/QSF3.8
Engine Power kW (hp)	64 (86)	60 (80)	134 (180)	80 (107)	85 (114)	91 (122)
Drill Power kW (hp)	15 (21)	8 (11)	8 (11)	27 (36)	32 (43)	40 (54)
Operating Weight kg (lb)	12,965 (28.582)	13,500 (29.762)	16,800 (37.037)	15,400 (33.951)	15,600 (34.392)	21,000 (46.297)
Min. Coverage Area m	2.8 x 2.8	3.5 x 3.0	4.5 x 4.5	7.1 x 6.7	8.0 x 7.6	11.4 x 8.7
Max. Coverage Area m	5.1 x 5.6	6.0 x 6.0	6.3 x 7.6	10.0 x 9.7	13.0 x 10.5	16.0 x 12.5



Specifications	RUS600	RUS800
Engine	RUS67/4TNV98	RUS65/4TNV98CT
Engine Power kW (hp)	67 (90)	70 (94)
Vertical Reach mm (ft)	6,022 (19.75)	8,035 (26.36)
Operating Weight kg (lb)	9,500 (20.943)	10,500 (23.148)
Max. Scaling Height mm (ft)	6,035 (19.79)	8,040 (26.37)
Max. Horizontal Reach mm (ft)	5,248 (17.21)	5,235 (17.17)



Specifications	RSD150
Engine	RSD242/QSB6.7
Engine Power kW (hp)	268 (359)
Drill Power kW (hp)	20 (27)
Drilling Depth mm (ft)	28,000 (91.86)
Operating Weight kg (lb)	15,000 (33.069)
Max. Total Height Vertical Feed mm (ft)	7,177 (23.54)



Specifications	RCRUSH400
Engine	Cummins
Production Capacity t/h	300 – 400
Crusher Weight tons (lb)	29 (58.000)
Bucket Capacity m3 (cu.yd)	3.2 (4.2)
Feed Height mm (ft)	4,900 (16.07)
Engine Power kW (hp)	328 (440)



Specifications	RHSCR-2040
Engine	6CTA8.3
Production Capacity t/h	200 – 400
Operating Weight tons (lb)	68 (149.914)
Mesh Size mm	5 – 100
Feed Height mm (ft)	4,600 (15.09)
Engine Power kW (hp)	120 (161)



Specifications	RCW1015T	RCW1520T	RCW2030T
Production Capacity t/h	10 – 15	15 – 20	20 – 30
Engine Power kW (hp)	160 (215)	200 (268)	358 (480)
Chain Plate Length mm (ft)	4,000 (13.12)	4,500 (14.76)	4,000 (13.12)
Chain Plate Width mm (ft)	1,300 (4.26)	1,400 (4.59)	1,300 (4.26)
Feeding Inlet Size mm	1,300 x 600	1,400 x 600	1,300 x 560



Specifications	RWCW-180	RWCW-190
Engine Power kW (hp)	234 (315)	413/416 (554/558)
Cutting Width mm (ft)	2,350 (7.70)	3,100 (10.17)
Work Speed km/h (mph)	0-3.0 (0-1.86)	0-3.0 (0-1.86)
Head Power kW (hp)	330 (443)	360 (483)
Operating Weight kg (lb)	18,000 (39.683)	19,000 (41.887)



Surface Drill Rigs

Crawler-Type Mobile Screening Station

Forestry Mulcher

Underground Scalers

Tracks Jaw Crusher Mobile Station

Wood Chippers



Specifications	RTH23-3	RTH23-3.5	RTH35-3.5	RTH23-4
Engine	YN38GBZ	YN38GBZ	YCD4M22T-105	YCD4J22T-115
Engine Power kW (hp)	76 (103)	76 (103)	77.3 (103)	55 (74)
Lift Height mm (ft)	7,000 (22.97)	7,000 (22.97)	10,600 (34.78)	7,000 (22.97)
Rated Capacity kg (lb)	3,000 (6.610)	3,500 (7.720)	3,500 (7.720)	4,000 (8.820)
Max. Reach m (ft)	3.2 (10.5)	3.2 (10.5)	5.7 (18.7)	3.2 (10.5)
Tires	16/70-20 (Pneumatic)	16/70-20 (Pneumatic)	16/70-20 (Pneumatic)	400/70-24 (Tubeless)



Specifications	RTH32-4	RTH45-4	RTH57-4	RTH32-5
Engine	YCD4J22T-115	YCD4J22T-115	YCD4J22T-115	YCD4J22T-125
Engine Power kW (hp)	85 (114)	85 (114)	85 (114)	91 (122)
Lift Height mm (ft)	9,800 (32.15)	13,800 (45.28)	17,600 (57.74)	9,800 (32.15)
Rated Capacity kg (lb)	4,000 (8.820)	4,000 (8.820)	4,000 (8.820)	5,000 (11.023)
Max. Reach m (ft)	6.1 (20)	7.0 (23)	12.0 (39.4)	5.0 (16.4)
Tires	400/70-24 (Tubeless)	440/80-24 (Tubeless)	440/80-24 (Tubeless)	16/70-24 (Semi-Solid)



Specifications	RTH45-5	RTH57-5	RTH57-6
Engine	YCD4J22T-125	YCD4J22T-125	4BT3.9-C125
Engine Power kW (hp)	91 (122)	91 (122)	110 (150)
Lift Height mm (ft)	13,800 (45.28)	17,550 (57.58)	17,600 (57.74)
Rated Capacity kg (lb)	5,000 (11.023)	5,000 (11.023)	6,000 (13.228)
Max. Reach m (ft)	8.0 (26.3)	11.2 (36.8)	12.0 (39.4)
Tires	440/80-24 (Tubeless)	440/80-24 (Tubeless)	17.5-25 (Tubeless)

Mining • Construction • Demolition • Waste • Paving • Agriculture • Power Generation

Rhino Equipment® is one of the world's top manufacturers of machinery and construction equipment. It has a full range of innovative products and solutions offering the best service and support worldwide; so it is always close to customers, we have a team of engineers and technicians to ensure quality and proper solution of our products.

- **EXCAVATORS**
- **BACKHOE LOADERS**
- **TRUCKS**
- **HAMMERS**
- **WHEEL LOADERS**
- **TRACK LOADERS**
- **VIBRATORY COMPACTORS**
- **TOWER CRANES**
- **COLD PLANERS**
- **ASPHALT PAVERS**
- **TANDEM ROLLERS**
- **PNEUMATIC ROLLERS**
- **MOTOR GRADERS**
- **SKID STEERS**
- **SOIL COMPACTORS**
- **WHEEL EXCAVATORS**
- **PIPELAYERS**
- **BULLDOZERS**
- **WHEEL DOZERS**
- **POWER GENERATORS**
- **FORKLIFTS**
- **LIGHT TOWERS**
- **MINING**
- **AGRICULTURE**
- **TELEHANDLERS**
- **ATTACHMENTS AND MORE...**



The availability of some models and equipment varies by country in which the equipment is used. Rhino Equipment reserves the right to change these technical or design specifications without prior notice and without incurring any obligation related to such change. Illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your Rhino dealer can give you details of the products and their specifications available in your area.