

REX230

EXCAVATOR

RHINO®
EQUIPMENT



Unprecedented precision and ease of operation

This Rhino excavator is loaded with enhancements that not only increase productivity and uptime, but lower daily operating costs, too. A high-efficiency “on-demand” cooling system, advanced multifunction monitor, and productivity modes to allow you to choose your digging style headline the long list of advances.








1. Level climate-control system with automotive-style adjustable louvers helps keep the glass clear and the cab comfortable.
2. LCD monitor provide intuitive access to a wealth of information and functions.
3. Ergonomically correct short-throw pilot levers provide smooth, predictable fingertip control with less movement or effort.


ENGINE	
Engine Model	Kubota V5009 · 09 Series
Emissions	EPA Tier 4 · Euro 5
Type	4 cycle, water-cooled
Bore x Stroke mm (in)	110 x 132(4.331 x 5.197)
Displacement L (cu. in)	5.017(306.2)
Aspiration	Turbo, after cooler
Aftertreatment	DOC + DPF
Rated Output kW (hp) @2,200	129.4(173.5)
Gross Intermittent Output kW (hp) @2,200	131.3(176.1)
Max. Torque N·m (lb-ft) @1,400	850(627)
Fuel System	Common-rail, direct injection
Dry Weight kg (lb)	652(1,437)
SPECIFICATIONS	
Bucket Capacity m3 (cu.yd)	1.1(1.44)
Swing Speed rpm	11 - 13
Gradeability ° (%)	30(58)
Max. Bucket Digging Force kN (lbf)	170(38,217)
Max. Arm Digging Force kN (lbf)	99(22,260)
Hydraulic System Pressure MPa (psi)	34(4,930)

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

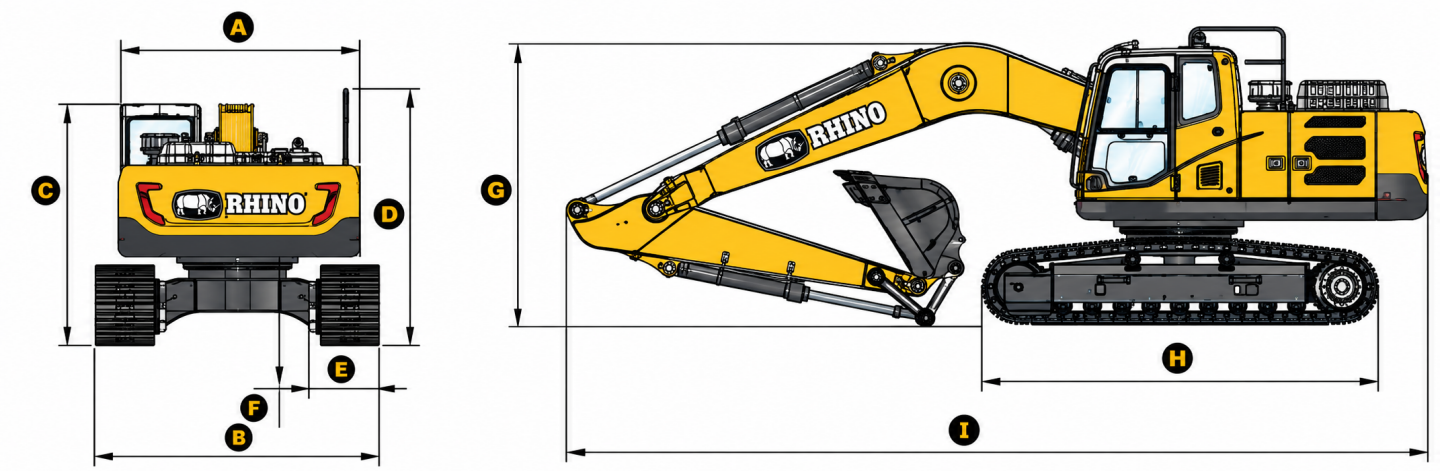

MACHINE DIMENSIONS	
A. Upper Structure Width mm (ft-in)	2,700(8-10)
B. Overall Width mm (ft-in)	2,980(9-9)
C. Cab Height mm (ft-in)	3,060(10-0)
D. Overall Height mm (ft-in)	3,185(10-5)
E. Track She Width mm (ft-in)	600(23.6)
F. Min. Ground Clearance mm (ft-in)	470(18.5)
G. Boom Height (Transport) mm (ft-in)	3,008(9-10)
H. Track Length mm (ft-in)	4,437(14-7)
I. Overall Length (Transport) mm (ft-in)	9,590(31-6)
Tumbler Distance mm (ft-in)	3,655(12-0)
Track Gauge mm (ft-in)	2,380(7-10)

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

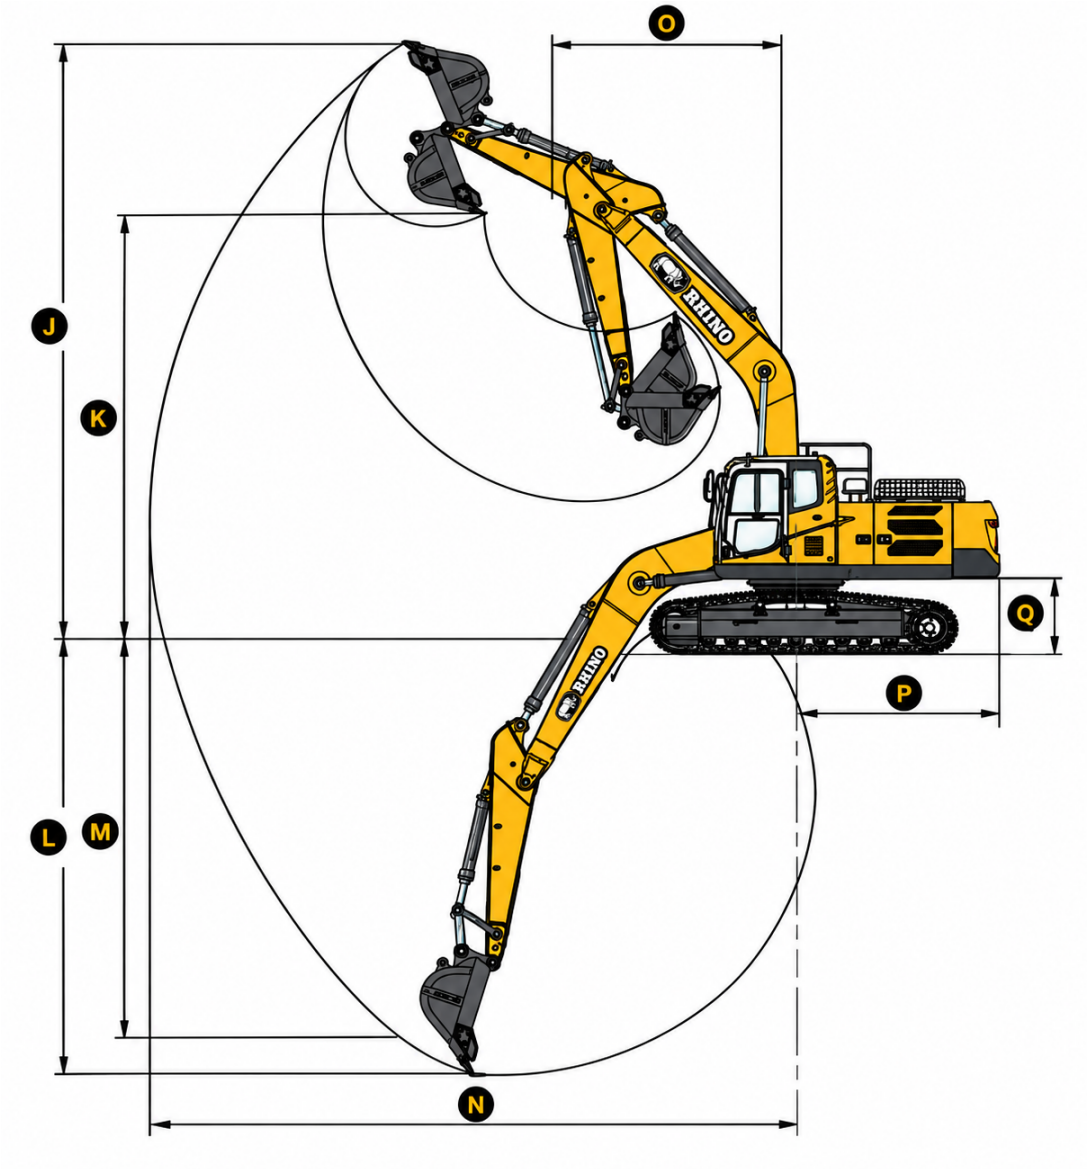

WORKING RANGE	
J. Max. Digging Height mm (ft-in)	9,410(30-10)
K. Max. Dumping Height mm (ft-in)	6,730(22-1)
L. Max. Digging Depth mm (ft-in)	6,480(21-3)
M. Max. Vertical Wall Digging Depth mm (ft-in)	5,925(19-5)
N. Max. Digging Reach mm (ft-in)	9,850(32-4)
O. Min. Swing Radius mm (ft-in)	3,555(11-8)
P. Tail Swing Radius mm (ft-in)	2,880(9-5)
Q. Counterweight Clearance mm (ft-in)	1,110(3-8)

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.

ATTACHMENTS

Rhino Excavators come standard with the hydraulic line for attachments, they include hydraulic hammers and many more.

Rhino Hydraulic Hammer Match: 1826EX




OPTIONS

Rhino Excavators can come with different options like: Tier2, Tier3, Tier4 Engine, Close cab, Rock bucket, Trench bucket, Thumb cutters, and many more according to work requirements.

ATTACHMENTS

Rhino Excavators come standard with the hydraulic line for attachments.

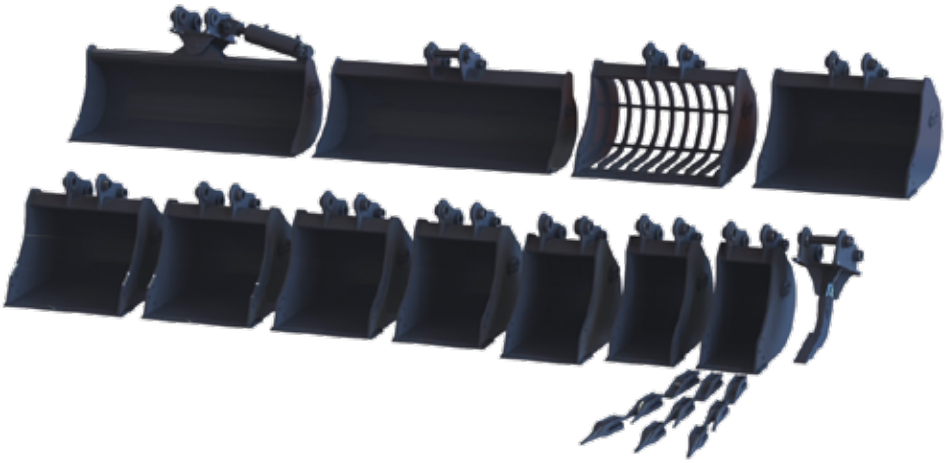



Many options buckets



Hydraulic hammers



Trenchers



Augers

and many more...