





HYDRAULIC HAMMERS



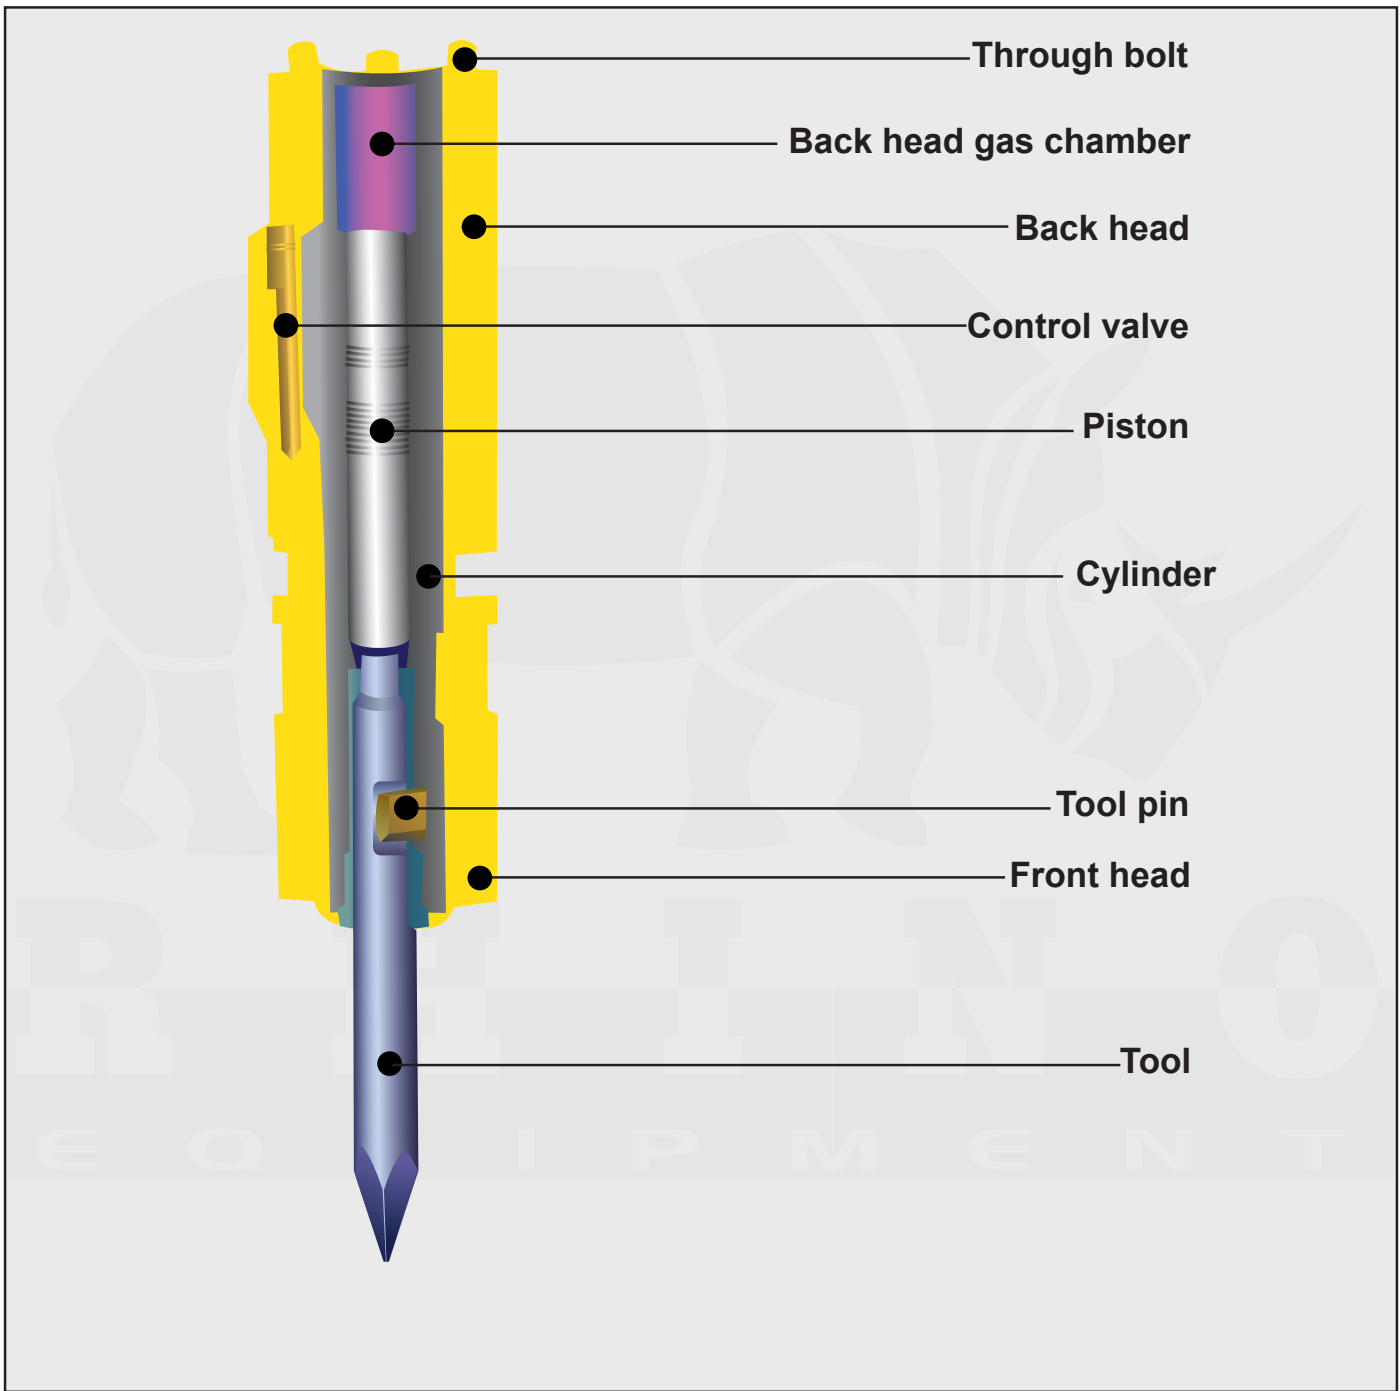

Tool Choice

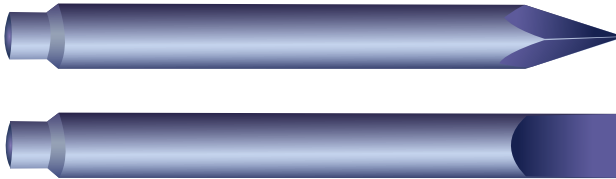

Moil point

Mining apications,
Universal tool

In-line chisel

Digging or narrow,
trenching & concrete demolitions

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.



Skid steer

RS50S
RS60S

Model		Skid Steer	
		254 SK	47 SK
Equipment Class	Kgs.	2500 - 4500	4000 - 7000
	Lbs.	5500 - 10000	8800 - 15400
Operational Weight	Kgs.	150	275
	Lbs.	331	606
Weight of Main Body	Kgs.	86	151
	Lbs.	190	333
Height (Incl. Tool)	mm	1342	1600
	inch	53	63
Required Oil / Flow Range	l/min	25 - 40	30 - 45
	gal/min	6.5 - 10.5	8.0 - 12.0
Operating Pressure	bar	90 - 120	95 - 130
	psi	1305 - 1740	1378 - 1885
Impact Range	bmp	600 - 1100	500 - 900
Rod / Chisel	mm	53	68
	inch	2.09	2.68
Hose Diameter	inch	1/2	1/2
Impact Energy Class	Kg / m	33	70
	joule	320	690
	ft x lb	236	509
Back Head Gas Pressure	bar / psi	16 - 232	16 - 232



Backhoe / Mini-excavator

RBH70
REX35
REX70
REX130

Model		Backhoe / Miniexcavator	
		47 BE	714 BE
Equipment Class	Kgs.	4000 - 7000	7000 - 14000
	Lbs.	8800 - 15400	15400 - 31000
Operational Weight	Kgs.	275	500
	Lbs.	606	1102
Weight of Main Body	Kgs.	151	280
	Lbs.	333	617
Height (Incl. Tool)	mm	1600	2101
	inch	63	83
Required Oil / Flow Range	l/min	30 - 45	45 - 85
	gal/min	8 - 12	12 - 22.5
Operating Pressure	bar	95 - 130	130 - 150
	psi	1378 - 1885	1885 - 2176
Impact Range	bmp	500 - 900	400 - 800
Rod / Chisel	mm	68	85
	inch	2.68	3.35
Hose Diameter	inch	1/2	3/4
Impact Energy Class	Kg / m	70	133
	joule	690	1300
	ft x lb	509	959
Back Head Gas Pressure	bar / psi	16 - 232	16 - 232

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.



Excavator

REX210
REX330
REX360
REX450
REX700

Model		Excavator		
		1826 EX	2735 EX	3255 EX
Equipment Class	Kgs.	18000 - 26000	27000 - 35000	32000 - 55000
	Lbs.	40000 - 57320	60000 - 77000	70500 - 121250
Operational Weight	Kgs.	1740	2420	3020
	Lbs.	3836	5335	6658
Weight of Main Body	Kgs.	750	950	1400
	Lbs.	1654	2094	3087
Height (Incl. Tool)	mm	2327	2500	2740
	inch	92	98	108
Required Oil / Flow Range	l/min	130 - 150	150 - 190	190 - 250
	gal/min	34 - 40	40 - 50	50 - 65
Operating Pressure	bar	160 - 180	160 - 180	160 - 180
	psi	2321 - 2611	2321 - 2611	2321 - 2611
Impact Range	bmp	400 - 500	300 - 450	250-400
Rod / Chisel	mm	135	150	160
	inch	5.32	5.91	6.30
Hose Diameter	inch	1	1	1 1/4
Impact Energy Class	Kg / m	459	714	1020
	joule	4500	7000	10000
	ft x lb	3319	5163	7376
Back Head Gas Pressure	bar / psi	6 - 87	6 - 87	9 - 131



- We have hydraulic hammer attachments for all types of industrial equipment such as construction, mining, demolition, etc.
- Rhino standards are famous for its high quality material and extra precise work
- Delivers from 236 Lbs to 7302 Lbs-ft of impact energy.

Equipment specifications and images may change without notice from Rhino Equipment Group Inc.